

Multimedia Projection HDTV Operating Instructions

Models No. PT-56DLX75/PT-61DLX75













(USA)	Three Important Reasons to Register Your Product		
For assistance, please call : 1-888-VIEW PTV(843-9788) or, contact us via the web at: http://www.panasonic.com/contactinfo	 Immediately! Protect Your New Investment Register your new Projection Display for insurance purposes in case your new Projection Display is stolen. 		
(Puerto Rico) For assistance, please call : 787-750-4300 or visit us at www.panasonicpr.com	 Product safety notification Registering your product can help us to contact you in the unlikely event a safety notification is required under the Consumer Product Safety Act. Improved Product Development Help us continue to design products that meet your needs. Register online at www.panasonic.com/register 		



* The presence of the DTV certification mark indicates that this product will successfully receive digital television transmissions that conform to any and all of the video formats described in the ATSC Digital Television Standard.

This operating instruction book is designed for use with models PT-56DLX75 and PT-61DLX75. Illustrations in this manual show the PT-56DLX75.

Before connecting, operating or adjusting this product, please read the instructions completely. Please keep this manual for future reference.

▲ IMPORTANT SAFETY INSTRUCTIONS



WARNING: To reduce the risk of electric shock, do not remove cover or back. No user-serviceable parts inside. Refer servicing to qualified service personnel.



2

This symbol warns the user that uninsulated voltage within the unit may have sufficient magnitude to cause electric shock. Therefore, it is dangerous to make any kind of contact with any inside part of this unit.



This symbol alerts the user that important literature concerning the operation and maintenance of this unit has been included. Therefore, it should be read carefully in order to avoid any problems.



The pictorial representation of a hot surface within a triangle is intended to tell the user that parts inside the product are a risk of burns to persons.

Note to CATV System Installer:

This reminder is provided to call the CATV system installer's attention to Article 820-40 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.

WARNING

To reduce the risk of electric shock, fire, injury to persons or damage to this product:

- 1) Read these instructions before using, connecting or adjusting this product.
- 2) Keep these instructions for future reference.
- 3) Heed all warnings on the product and in this Operating Instructions manual.
- 4) Follow all instructions carefully.
- 5) **Do not use this apparatus near water.** For example, near a bathtub, washbowl, kitchen sink, or laundry tub, in a wet basement or near a swimming pool, and the like. Do not place objects filled with water, such as a vase or the like, on top of this unit.
- 6) Clean only with a dry cloth. Do not use liquid cleaners or aerosol cleaners.
- 7) **Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.** Openings in the cabinet are provided for ventilation to ensure reliable operation and to protect it from overheating. Never block openings by placing the product on a bed, sofa or similar surfaces.
- 8) Do not install near any heat source such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produces heat. Do not install in a built-in installation such as a bookcase or rack, unless proper ventilation is provided or the manufacturer's instructions have been adhered to.
- 9) Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- 10) Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- 11) Only use attachments/accessories specified by the manufacturer.
- 12) Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.



- 13) Unplug this apparatus during lightning storms or when unused for long periods of time.
- 14) Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- 15) Because the temperature of the lamp unit is elevated immediately after its use, a direct touch to it may cause burns. **Replace the lamp unit only after it has cooled.**

▲ IMPORTANT SAFETY INSTRUCTIONS (CONTINUED)

🛦 WARNING

AS WITH ANY SMALL OBJECT, SD CARDS CAN BE SWALLOWED BY YOUNG CHILDREN. DO NOT ALLOW CHILDREN TO HANDLE THE SD CARD.

A WARNING

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE. DO NOT PLACE OBJECTS FILLED WITH WATER, SUCH AS A VASE OR THE LIKE, ON TOP OF THIS APPARATUS.

A CAUTION

- (1) This Projection Display is intended to be used with the following TV stand: TY-56LC65C for the PT-56DLX75, and TY-61LC65C for the PT-61DLX75. Use with other stands may result in the Projection Display becoming unstable, possibly causing injury.
- (2) This Projection Display should not be exposed to direct sunlight, extreme temperatures or moisture, as this can result in serious irreparable damage.
- (3) This Projection Display has a High Intensity Discharge (HID) lamp that contains a small amount of mercury. It also contains lead in some components.

Disposal of these materials may be regulated in your community due to environmental considerations. For disposal or recycling information please contact your local authorities, or the Electronics Industries Alliance: http://www.eiae.org.

The Lamp is a consumable item and has a life.

The lamp should be changed as soon as possible once the lamp warning message appears. (See page 66.) If the lamp is damaged, please contact your nearest dealer.

Due to the characteristics and use conditions of individual lamps, the lamp may cease to light before the stated lamp life.

Influences of frequent lighting, continuous light use for over 24 hours, the number of times lit, the length of time between lightings, etc. may shorten lamp life.

(Because of this, we recommend having a replacement lamp on hand.)

Trademarks

- VGA and XGA are trademarks of International Business Machines Corporation.
- Macintosh is a registered trademark of Apple Computer, USA.
- SVGA is trademark of the Video Electronics Standard Association.
- Even if no special notation has been made of company or product trademarks, these trademarks have been fully respected.
- Equipped with dbx° -TV Noise Reduction for true MTS reproduction. dbx° -TV Noise Reduction is required for good stereo
- separation and audio fidelity. dbx® is a registered trademark, and is licensed by dbx® Technology Licensing.
- CableCARD[™] is a trademark of Cable Television Laboratories, Inc.



HDMI, the HDMI logo and High Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.



SD Logo is a trademark.

Digital Light Processing[™], DLP[™], the DLP[™] logo, and the DLP[™] medallion are trademarks of Texas Instruments.



Manufactured under license from BBE Sound, Inc. Licensed by BBE Sound, Inc. under USP5510752 and 5736897. BBE and BBE symbol are registered trademarks of BBE Sound, Inc.



Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories.

U.S. Patent Nos. 4,631,603; 4,577,216; 4,819,098; 4,907,093; 6,381,747; and 6,516,132.

This product incorporates copyright protection technology that is protected by U.S. patents and other intellectual property rights. Use of this copyright protection technology must be authorized by Macrovision, and is intended for home and other limited viewing uses only unless otherwise authorized by Macrovision. Reverse engineering or disassembly is prohibited.

License description: To view the license information for software used in this product, press the Menu button and select "Setup" \rightarrow "About" \rightarrow "License". (See page 57).

Note:

• Do not allow a still picture to be displayed for an extended period, as this can cause a permanent afterimage to remain on this unit. Examples of still pictures include logos, video games, computer images, teletext and images displayed in 4:3 mode.

Dear Panasonic Customer

Welcome to the Panasonic family of customers. We hope that you will have many years of enjoyment from your new Projection Display.

To obtain maximum benefit from your set, please read these Instructions before making any adjustments, and retain them for future reference.

Retain your purchase receipt also, and record the serial number of your set in the space provided on the rear cover of these instructions.

Visit our Panasonic Web Site for USA : www.panasonic.com

(USA) For assistance, please call : 1-888-VIEW PTV(843-9788) or, contact us via the web at: http://www.panasonic.com/contactinfo

(Puerto Rico) For assistance, please call : 787-750-4300 or visit us at www.panasonicpr.com

FCC STATEMENT:

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

· Reorient or relocate the receiving antenna.

• Increase the separation between the equipment and receiver.

• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio / TV technician for help.

FCC Caution:

To assure continued compliance, follow the attached installation instructions and use only shielded interface cables when connecting to computer or peripheral devices. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

ANY CHANGES OR MODIFICATIONS TO THIS PTV RECEIVER NOT EXPRESSLY APPROVED BY PANASONIC CORPORATION OF NORTH AMERICA COULD CAUSE HARMFUL INTERFERENCE, WHICH WOULD VOID THE USER'S AUTHORITY TO OPERATE THIS EQUIPMENT.

The Class II insulation symbol (square within a square) indicates that this product has been evaluated and tested to comply with Class II insulation requirements.

Declaration of Conformity				
Models Number:	PT-56DLX75/PT-61DLX75			
Trade Name:	Panasonic			
Responsible party:	Panasonic Corporation of North America			
Address:	One Panasonic Way Secaucus New Jersey 07094			
Telephone number:	1-888-VIEW PTV(843-9788)			
This device complies	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This			
device may not cause harmful interference, and (2) this device must accept any interference received, including				
interference that may cause undesired operation.				

Table of Contents

To Start !

▲ IMPORTANT SAFETY INSTRUCTIONS	2
Before Using	
Location of Controls	
Installation	

Use Now !

Power ON / OFF	
Basic Menu Navigation	
Tuning channels	
Projection Display operation	
ASPECT Controls	
Split screen	

Enjoy More !

Picture Adjustments	
Audio Adjustments	
Sleep Timer Feature	
Lock Feature	
Photo Viewer	49
Setup Features	54

Other
InformationRemote Control Quick Reference Guide (Operating peripheral equipment)58Warning Indicators65Replacing the lamp unit66Troubleshooting68Specifications69Cleaning70Customer Services Directory70Limited Warranty71Other Information72Index79

Before Using

Receiver Location

This Projection Display is intended to be used with an optional stand or entertainment center. Consult your dealer for available options.

Locate for comfortable viewing. Avoid placing where sunlight or other bright light (including reflections) will fall on the screen.

Use of some types of fluorescent lighting can reduce Remote Control transmitter range.

Adequate ventilation is essential to prevent internal component failure. Keep away from areas of excessive heat or moisture.

Optional External Equipment

The Video / Audio connection between components can be made with shielded video and audio cables. For best performance, video cables should utilize 75 Ω coaxial shielded cables. Cables are available from your dealer or electronic supply house.


Before you purchase any cables, be sure you know what type of output and input connectors your various components require. Also determine the length of cable you'll need.

Safety Precaution

Please take safety precautions to prevent the unit from falling over.

WARNING

The unit may tip or fall if not situated on a stable surface, if pushed or during an earthquake. Use a strong rope or chain (not included) to fasten the Projection Display firmly to a strong wall support.




Accessories

Remote Control
 Batteries 2 "AA"


(EUR7627Z70)

Viewing position

To optimize your viewing comfort, please follow the viewing guidelines shown in the diagrams below. If viewing for an extended period of time, sit as far back from the screen as possible.

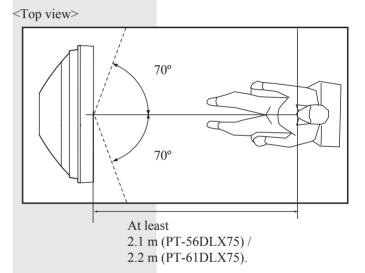







Remote Control Battery Installation

Requires two AA batteries (supplied).


1. While pressing in on the catch, open cover in direction of arrow.



 Install the batteries as shown in the battery compartment. (Polarity + or - must match the markings in the compartment).



3. Press cover in direction of arrow until it snaps shut.



Helpful Hints:

- (1) For frequent remote control users, replace old batteries with Alkaline batteries for longer battery life.
- (2) Whenever you remove the batteries, you may need to reset the remote control infrared codes. We recommend that you record the code on pages 58-59, prior to setting up the remote.

Emergency Alert System (EAS) Forced Tuning

If a CableCARD[™] is installed, the cable MSO (multiple system owner/operator) may provide an Emergency Alert System message. These messages are intended to alert the general public of important local or national emergency situations. In the event of receipt of one of these messages, the Projection Display shall immediately tune to the channel as directed by the EAS message. If the channel has been blocked using the parental control, the parental blocking has priority over the forced tune.

Reset All Memory Functions

Use when moving unit to a new location, or First Time Setup needs to be redone.

CAUTION

Incorrect battery installation can cause the batteries to leak, leading to personal injury and/or damage to the remote control.

Observe the following precautions:

- Batteries should always be replaced as a pair. Always use new batteries when replacing the old set.
- 2. Do not combine a used battery with a new one.
- Do not mix battery types (example: "Zinc Carbon" with "Alkaline").
- 4. Do not attempt to charge, short-circuit, disassemble, heat or burn used batteries.
- 5. Battery replacement is necessary when the remote control acts sporadically or stops operating the Projection Display set.



Press the VOL- button on the unit and OK button on the Remote control at the same time for more than 3 seconds. When reset is done, power shuts off automatically.



Before Using (continued)

Glossary and Acronyms

CC (Closed Captioning)

EAS (Emergency Alert System)

OSD (On-Screen Display)

MSO (Multiple system owner/operator)

Dolby Digital

This is a method of coding digital signals developed by Dolby Laboratories. Apart from stereo (2-channel) audio, these signals can also be multichannel audio. A large amount of audio information can be recorded on one disc using this method.

PCM (pulse code modulation)

These are uncompressed digital signals, similar to those found on CDs.

DTV (Digital Television)

Name of the process whereby television picture and sound signals are changed to digital code for receiving and transmitting.

HDTV (High Definition Television)

Television with improved picture quality by increasing vertical and horizontal resolution.

ATSC (Advanced Television Systems Committee)

Standardization body that developed the Digital Television Terrestrial formats.

HDMI (High Definition Multimedia Interface)

Interface that supports every uncompressed digital format as well as all existing multi-channel audio format on a single cable.

JPEG (Joint Photographic Experts Group)

A system used for compressing/decoding color still pictures.

MPAA (Motion Picture Association of America) Guild governing rating assignments to movies.

NTSC (National Television Systems Committee) Standardization body that developed the Analog Television Terrestrial formats.

Password

A four (4) digit code a user must provide in order to perform a function.


CableCARD™

A module that is required to receive premium digital services through the cable input.

Getting Started

Location of Controls

Illuminated Remote Control

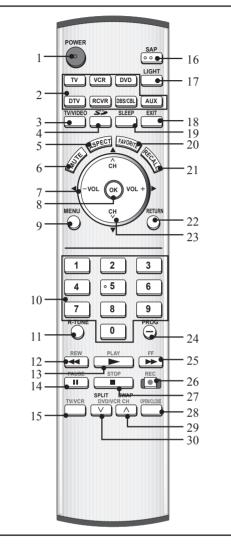

	1	1		
1	POWER	Press to turn ON and OFF.		
	ту	Sets the remote to communicate		
		with television or digital television.		
2	VCR, DVD,	Sets the remote to communicate		
	DTV, RCVR,			
	DBS/CBL, AUX	with other devices.		
3	TV/VIDEO	Changes Input source.		
1	4 SD	Accesses the Photo Viewer		
4		feature.		
5	ASPECT Changes display aspect ratio.			
6	6 MUTE Press to mute sound.			
7	VOL -+ / ◀►	Press to adjust TV sound and		
		navigate in menus.		
8	ок	Press to select menu and sub-		
8	8 UN	menu items.		
9	MENU	Press to display Main Menu.		
		Press numeric keypad to select		
10	Number	any channel or press to enter		
		alphanumeric input in menus.		

11	R-TUNE	Press to switch to previously
		viewed channel or input modes.
12	REW	While remote is in VCR or DVD
		mode, press to rewind.
13	PLAY	While remote is in VCR or DVD
		mode, press to play. While remote is in VCR or DVD
14	PAUSE	mode, press to pause.
15	TV/VCR	Press to switch to TV or VCR.
15		In analog mode, press to access
		audio modes (Stereo, SAP or
16	SAP	
		Mono). In digital mode, press to
		access next audio track.
1.5		Lights all buttons. The selected
17	LIGHT	mode button (TV, VCR, etc.)
		flashes.
18	EXIT	Press to exit menus.
		Press to set unit to shut itself off
19	SLEEP	after a preselected amount of
		time.
20	FAVORITE	Press to operate the Favorite
20		channel list function.
21	RECALL	Press to display or delete Channel
<u>~1</u>		banner.
22	RETURN	Press to return one step backward
		in menus
22	CH ∧v / ▲ ▼	Press to change channels and
23		navigate in menus.
	PROG	Press after entering major channel
24		numbers to enter minor (-)
		channel numbers.
25	EE	While remote is in VCR or DVD
23		mode, press to fast forward.
20	DEC	While remote is in VCR or DVD
20	REC	mode, press to record.
27	STOD	While remote is in VCR or DVD
27	STOP	mode, press to stop.
28	OPEN/CLOSE	While remote is in DVD mode,
20		press to open or close DVD tray.
	SWAP	Press to swap Main screen with
	DVD/VCR CH ^	Split screen.
29		While remote is in VCR or DVD
		mode, press to change channels
		for DVD or VCR.
	SPLIT	Press to display or delete Split
	JFLII	screen.
30		While remote is in VCR or DVD
	DVD/VCR CH v	mode, press to change channels
		for DVD or VCR.


Note:

• This section describes TV mode only. For other modes, see pages 58-64.

Location of Controls (continued)


Controls and Terminals on the Projection Display

Front View <Model PT-56DLX75 unit shown>

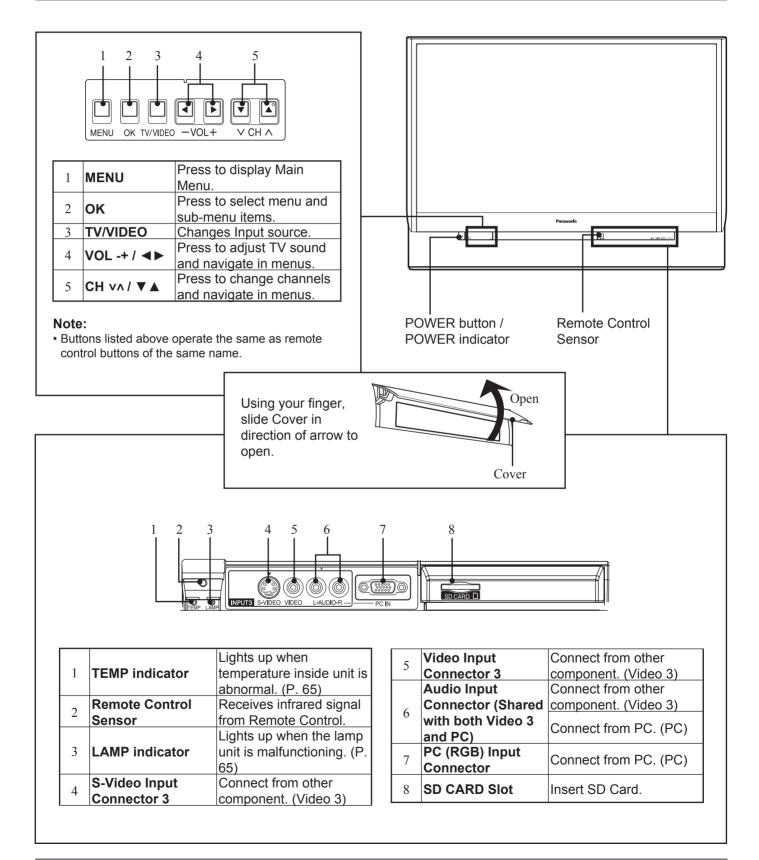

10

Rear View < Model PT-56DLX75 unit shown>

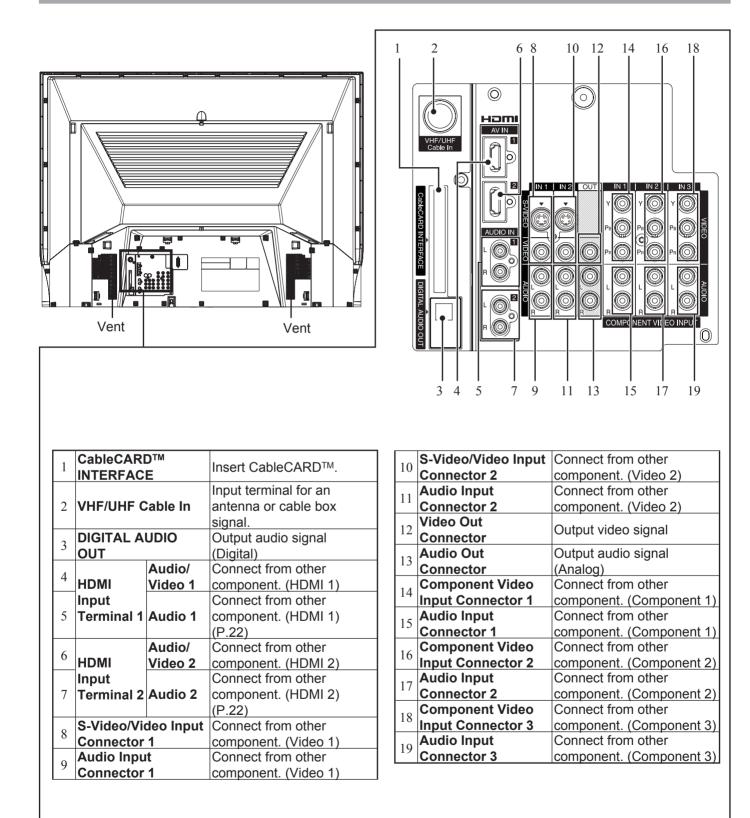

- · Make sure the vents are not blocked. (This could cause damage.)
- Indication on the back panel may change without notice.

Notes on connections


- Turn off the power supply for all components before making any connections.
- If the cables necessary for connecting a component to the system are not included with the component or available as an option, you may need to fashion a cable to suit the component concerned.
- Read the instruction manual for each system component carefully before connecting it.
- If there is a lot of jitter in the video signal input from the video source, the picture on the screen may flicker. In this case, it will be necessary to connect a TBC (time base corrector).

When using "Nut type" RF coaxial cable, tighten with fingers only. Overtightening may damage terminal.

Connecting the Antenna / Cable to the RF IN Terminal

Antenna Connection


For proper reception of digital and analog VHF/UHF channels, an external antenna is required. For best reception, an outdoor antenna is recommended.

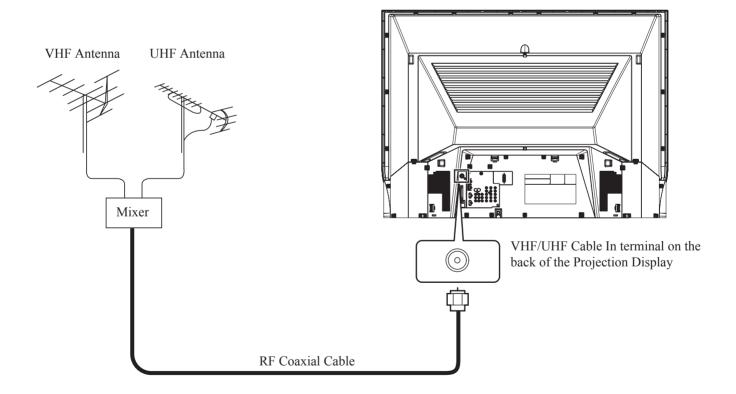

Cable Connection

For proper reception of analog or digital cable channels, a cable service connection is required.

Use this configuration when connecting the projection display to a cable TV system.

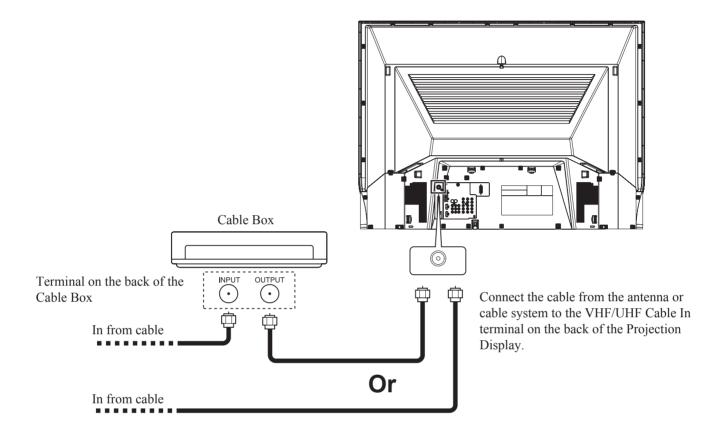

Notes:

• Certain cable systems offset some channels to reduce interference or have Premium (scrambled) channels. A cable converter box is required for proper reception. Check with your local cable company for its compatibility requirements.


• For reception of cable channels, connect the cable supplied by your local cable company.


Installation (continued)

CableCARD[™] Connection

This module (also called Point of Deployment (POD) module or Digital Cable Module (DCM)) allows you to tune digital and high definition cable channels through the cable antenna. Contact your local cable company for information regarding the availability and costs of CableCARD™ related services.

- 1 Connect the cable antenna to VHF/UHF Cable In input on the back of the unit.
- Insert the CableCARD[™] (upper side facing left) into the CableCARD[™] INTERFACE on the back of the unit.
 Insert when Power is ON (green indicator light) and a MENU screen is not displayed.

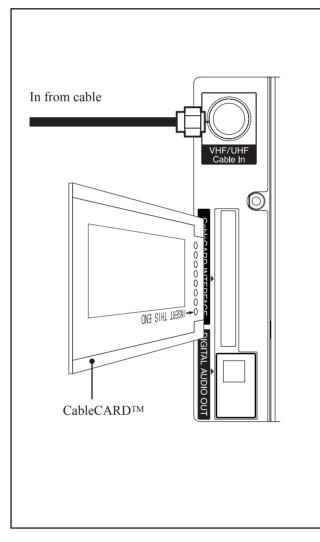

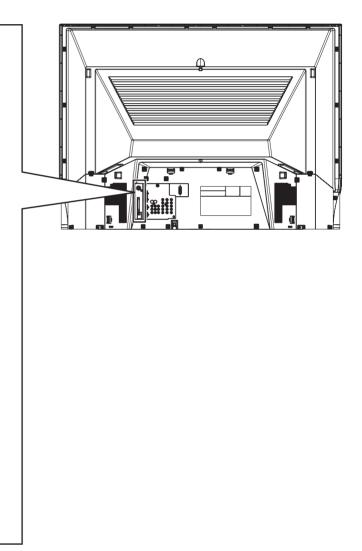

Notes:


- A Digital Cable Subscription is required.
- Do not insert a PC card into the CableCARD™ INTERFACE.
- Follow the instructions on screen.

If you experience keyboard or remote control function hang-up when using CableCARD[™], unplug the unit and plug it back in and try the controls again. If this condition still exists, please call Panasonic Customer Call Center for further instructions.


How to connect the "1, 2, 3" Input Terminals

Input 3 is located on the front of the unit. (P. 10)

Connects VCRs and other peripheral equipment

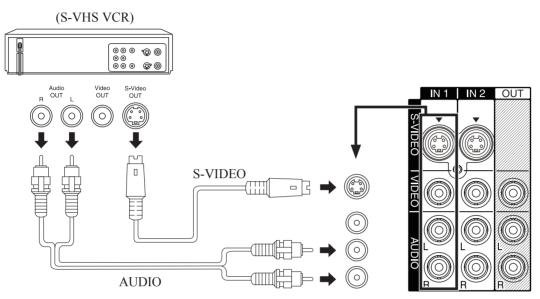

• Similar connections are available at the INPUT 1, 2, 3 input terminals. (PP. 10-11)

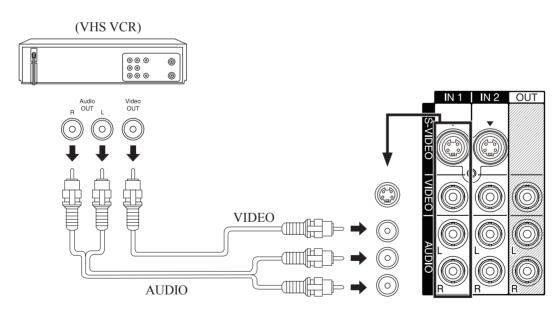

• Similar connections are available at the INPUT 1, 2, 3 input terminals. (PP. 10-11)

- · Select the desired VIDEO input position by pressing the TV/VIDEO button. (P. 32)
- When connecting video cables, priority is given to the S-Video cable when the S-Video input terminal and the video input terminal are connected at the same time.


Installation (continued)

How to connect the COMPONENT VIDEO Input Terminals

Because each Y, P_B, and P_R signal is input independently, the Component signal allows for more accurate color reproduction.

The Component signal output terminal indication will differ according to the output device (Y, P_B, P_R). Please read the operating instructions included with the output device.

Connecting a DVD Player to COMPONENT VIDEO IN

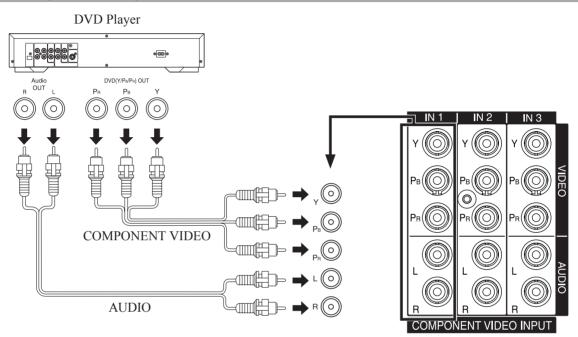

• Similar connections are available at the COMPONENT VIDEO INPUT 1-3 Terminals. (PP. 10-11)

Notes:

- Select the desired COMPONENT VIDEO INPUT position by pressing the TV/VIDEO button. (P. 32)
- Component video signals that can be input are 480i, 480p, 720p, and 1080i.

Component Signals (Y, PB, PR) that can be Input


Mode type		Signa	Information many	
		No. of dots (H × V)	Vertical frequency (Hz)	 Information menu display
lat	480i	720 × 480	59.94/60.00	480i
orm als	480p	720 × 480	59.94/60.00	480p
DTV Form Signals	720p	1 280 × 720	59.94/60.00	720p
6	*1080i	1 920 × 1 080	59.94/60.00	1080i

Note:

• Input signals, other than those listed with a * mark, will give you a beautiful, stable picture.

How to connect the AV OUT Terminals

You can connect a VCR to the AV OUT terminal to record the program you are viewing on-screen. An external monitor can also be connected to the AV OUT terminals. Connect the VCR as shown below.

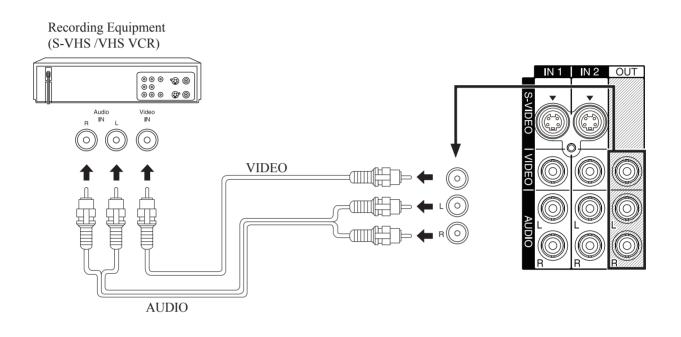

- This unit contains Video and Audio Outputs for the purpose of recording television programming to VCR. Due to license restrictions, if a device (STB, DVD, etc.) is connected to the HDMI input of the unit, no video or audio output is allowed.
- AV Out signal is available when receiving digital channel. However, all formats will be down converted to NTSC.
- Never connect the VIDEO IN and OUT terminals to the same video recorder, as this could cause incorrect operation.
- Even if unit is in Split mode, OUT terminals only output the main picture and sound signals. A sub-picture, etc., will not be output.
 AV terminals will not output Y, PB, PR, PC/HDMI IN or SD card signals.
- Certain program content output from the AV Out connector may have the Macrovision signal modification applied to its signal, preventing VCRs from recording this video signal.

Installation (continued)


How to connect the Amplifier

Analog Audio Out

To listen to the audio through a separate stereo system, connect an external audio amplifier to AUDIO OUT on back of unit.

Stereo System

(A Stereo Amplifier and Speakers)

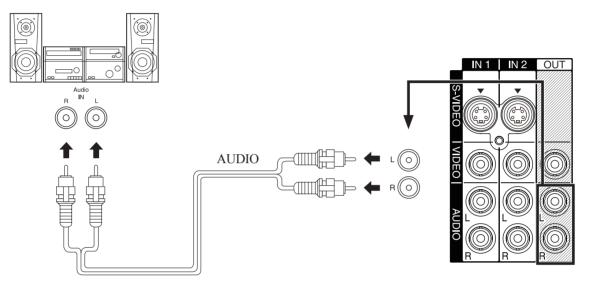

Audio Adjustments


- Select Speakers Off in Other Adjust menu under Audio menu. (See page 43.)
- · Set amplifier volume to the preferred level.

- AUDIO OUT terminals cannot be connected directly to external speakers.
- AV terminals will not output Component Video, PC/HDMI IN or SD card signals.

Digital Audio Out

Use the diagram below to connect the Digital Audio Output of your Projection Display to a Dolby Digital decoder.

Dolby Digital 5.1 channel surround sound delivers digital-quality sound. Dolby Digital provides five discrete full-bandwidth channels for front left, front right, center, surround left and surround right, plus a LFE (Low Frequency Effect) subwoofer channel, For a full Home Theater sound experience, an external Dolby Digital decoder and a multichannel amplifier must be connected to the Digital Audio Out jack on the unit.

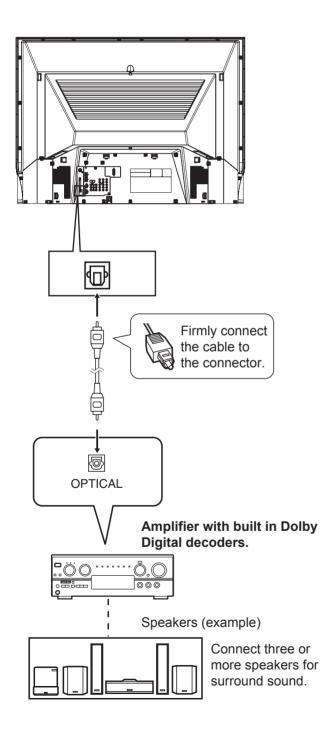

Procedure


Connect the Digital Audio cable from the Digital Audio Out jack on the unit to the Digital Audio In connection on the Dolby Digital decoder.

- When ATSC channel is selected, the output from the Digital Audio Out jack will be Dolby Digital. But, if NTSC channel is selected, the output will be PCM.
- Depending on your DVD player and DVD-Audio software the copyright protection function may operate and disable optical output.


Installation (continued)

How to connect the PC IN Terminals

Connecting a PC to PC IN

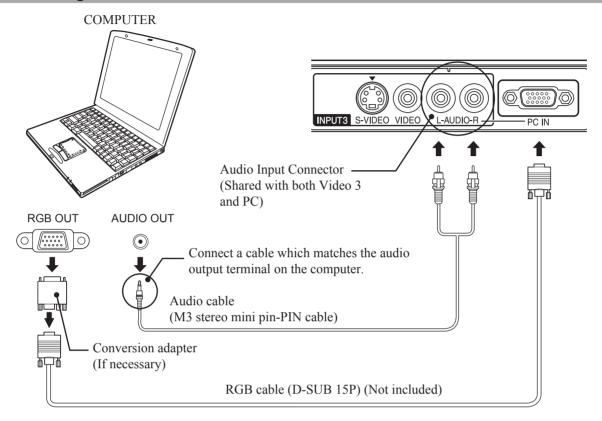

PC IN Terminal (D-SUB 15P) Pin Layouts



Connection port view

Pin No.	Signal name	\Box	Pin No.	Signal name
1	R		9	NC
2	G		10	Ground
3	В		11	NC
4	NC		12	NC
5	NC		13	HD/CSYNC
6	Ground for R		14	VD
7	Ground for G	IL	15	NC
8	Ground for B			



- Some PC models cannot be connected to the set. A conversion adapter is required to use the RGB cable (D-SUB 15P) (Not included) to connect a Macintosh computer to the set. There is no need to use an adapter for computers with PC / AT compatible D-SUB 15P terminal.
- The computer shown in the illustration is for example purposes only. Additional equipment and cables shown are not supplied with this set.
- Do not set the horizontal and vertical scanning frequencies for PC signals which are above or below the specified frequency range.
- Select the desired PC input position by pressing the TV/VIDEO button. (P. 32)

RGB signals that can be input

The table below lists the different types of RGB signals that can be input.

If a signal which differs greatly from the types listed below is input, the picture may not be displayed correctly, or a black background may be displayed. In this case, "signal" will flash on-screen for about 5 seconds.

Mode type		Signal data			Information menu
		No. of dots (H × V)	Horizontal frequency (kHz)	Vertical frequency (Hz)	display
uter	VGA400 (70 Hz)	640 × 400	31.47	70.08	VGA400
nal Computer Signals	VGA480 (60 Hz)	640 × 480	31.47	59.94	VGA480
sigr	SVGA (60 Hz)	800 × 600	37.88	60.32	SVGA
Persor	* XGA (60 Hz)	1 024 × 768	48.36	60.00	XGA

Notes:

• Input signals, other than those listed with a * mark, will give you a beautiful, stable picture.

• The D-SUB15P connector can accept RGB (H-V sync separate).

• When an external video processor/scaler is used, it must have RGB (H-V sync separate) output.

Installation (continued)


How to connect the HDMI input terminal

About HDMI

HDMI is the first all digital consumer electronics A/V interface that supports several uncompressed standard, enhanced and high definition video format as well as all existing multi-channel audio formats. One jack supports both video and audio information. The HDMI/HDCP*1 input can be connected to an EIA/CEA 861/861B*2 compliant consumer electronic device, such as a set top box or DVD player equipped with a HDMI output connection. By inputting a High-bandwidth Digital Content Protection (HDCP) high definition picture source to the HDMI terminal of this unit, high definition pictures can be displayed on the screen in their digital form. The HDMI input terminal is not intended to be used with personal computers. This unit is compatible with 1080i, 720p, 480p and 480i formats. Select the output of the connected device to match that of the unit.

Connection diagram

Follow the diagram below to connect the unit to a set top box or a DVD player.

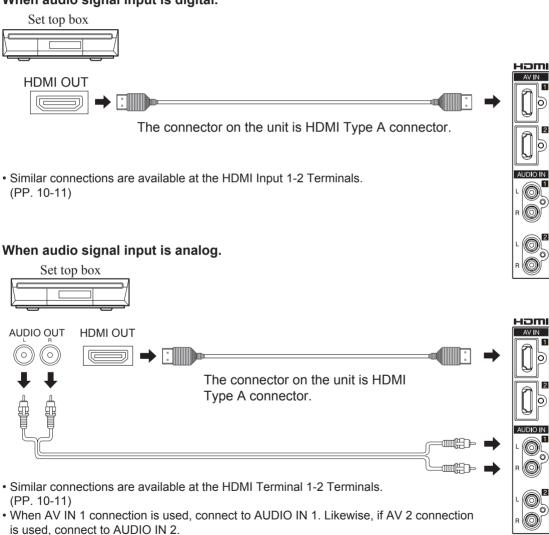

When audio signal input is digital.

Notes:

22

- *1HDMI/HDCP = High Definition Multimedia Interface / High-Bandwidth Digital Copy Protection.
- *2EIA/CEA-861/861B Profiles compliance covers profiles for transmission of uncompressed digital video including high bandwidth digital content protection.

Procedure

 Connect the HDMI output from the set top box or a DVD player to the HDMI input on the back of the unit.
 If you cannot display the picture because your Digital Set Top Box does not have a Digital Out terminal setting, use the Component Video Input (or the S-Video Input or Video Input). In this case, the picture will be displayed as an analog signal.

2 Press TV/VIDEO to select HDMI input.

By inputting a High-bandwidth Digital Content Protection high-definition picture source to the HDMI IN terminals of this Projection Display, high-definition pictures can be displayed on the screen in their digital form. (This terminal is for use in the future when High-bandwidth Digital Content Protection DVD players and D-VHS are put on the market.)

Notes:

- Select the HDMI input position by pressing the TV/VIDEO button. (P. 32)
- The HDMI IN terminals can only be used with 1080i, 720p, 480p and 480i picture signals.
- If there is no audio, check if the source equipment has PCM output. If not, please use analog connections.
- Be sure HDMI is securely connected. If not, picture noise and/or incorrect picture display may result.
- With HDMI connection, depending on the signal, the picture may be displayed with unnatural colors (as if red and blue are reversed). Refer to "Color Corr." on page 41.

Compatible formats

Video Signal:

The Projection Display is compatible with following formats. Please set the connecting device to following format.

Display mode	No. of dots	Vertical scanning frequency (Hz)	Information menu display
1080i *	1920 × 1080	59.94 / 60	1080i
720p	1280 × 720	59.94 / 60	720p
480p	720 × 480 640 × 480	59.94 / 60 59.94 / 60	480p
480i	720 × 480	59.94 / 60	480i

Audio signal (PCM)

When digital audio is included in the HDMI connection, the compatible sampling frequencies are 48 kHz/44.1 kHz/ 32 kHz. Refer to "HDMI In" on page 43.

Power ON / OFF




Turning the Power ON and OFF

Always be sure to follow the procedure given below to turn the Projection Display power ON and OFF. • The lamp cooling fan will continue to operate for

approximately 1 minute after the power is turned off. During this time, the POWER indicator will blink Red.

Do not disconnect the power cord from the outlet and do not open the circuit breaker (unless necessary) while the cooling fan is still operating. Do not disconnect the power cord from the power outlet while the power indicator blinks Red.

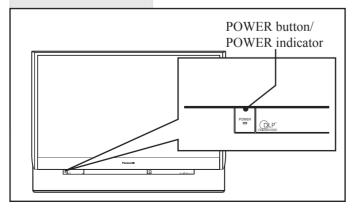

24

The Power Indicator

LED	ACTION	
Off	Power – OFF	
Red (blinking)	Power – OFF (Now cooling)	
Green	Power – ON	
Green (blinking)	Power – ON (Preparing to light lamp)	

Notes:

- If the POWER button is accidentally turned off during use, after power is turned back on, it may take a short period before the lamp automatically comes on.
- After the unit is turned on, maximum picture brightness will be achieved in 5-10 minutes. This is normal.
- This unit consumes approx. 0.1 W (15 W when CableCARD[™] is inserted.) in OFF condition when plugged into an AC outlet.

Power ON

Press POWER on Projection Display or Remote Control to turn power on.

The Power Indicator blinks Green for about 15 seconds and then turns solid Green.

Power OFF

Press POWER on Projection Display or Remote Control to turn power off.

Power shuts off after a Black Screen is displayed for a few seconds.

Note:

• If the POWER button is pressed during the Black Screen display, Power is turned back on.

The Power Indicator blinks Red for about 1 minute and then LED turns off.

Note:

• When the power cord is disconnected, the internal cooling fan stops operating. In this case, the lamp will be insufficiently cooled and will take a while to turn ON again.

Auto shut off

To extend lamp life, if there is no signal to the set's tuner for 5 minutes, the lamp will shut off automatically.


First Time Setup

For your convenience, First Time Set up menu will be displayed on screen when the set is turned on for the first time. If needed, follow the menus and procedures displayed on-screen for setting up the features.

Language


The language of the on-screen display is set to English as the factory setting.

You can select English, Spanish or French as the on-screen displays language.

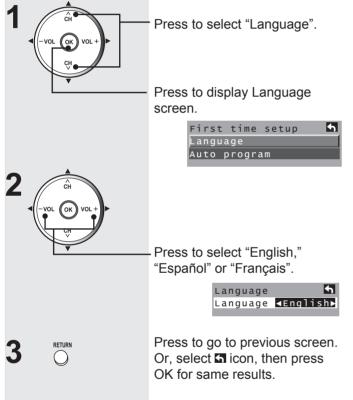


Auto program


You can scan All (Analog and Digital) channels. If needed, follow the menus and procedures displayed on-screen for setting up the features. You can also make the settings in Setup menu.



Press to select "Auto program".

Press to display Auto program screen.



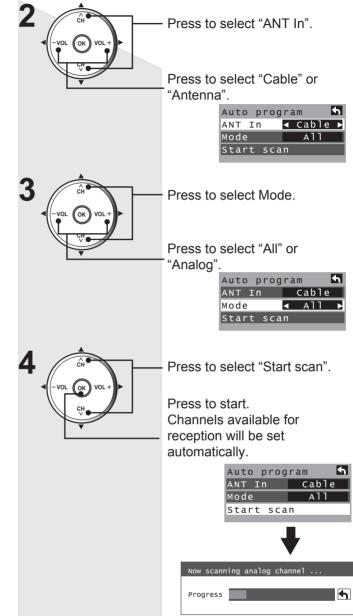

5 After Auto Program is complete, the unit will return to Manual Program mode. To place the channels that were located by auto scan in memory, move the cursor to "Apply" and press OK. (pp. 30-31). If OK is not pressed after selecting OK, the channels will not be memorized.


Notes:

• After "Auto program" is completed the unit tunes to the first channel found during "Auto program".


- If setup is incomplete, check connection of Antenna/Cable to the RF IN Terminal, then try "Auto program" again. (p. 29).
- "Auto program" must be done when you select the input signal for the first time or whenever you change the antenna configuration.
- Depending on conditions, "Auto program" may take a while.


Basic Menu Navigation

POWER	Button operation during Menu display (Menu navigation)
	Return to Main Menu. Press to display Main menu. Picture Audio Timer Lock (PC input menu) Memory Card Setun
1 2 3 4 °5 6 7 8 9 R-TUNE 0 PROG	 Setup Audio Note: While Main Menu (only) is displayed, pressing MENU will exit the menu screen.
REW PLAY FF PAUSE STOP REC REC	Return to previous level menu.
TVVCC PUDVCRCH OFENCAGE	Press to return to previous level menu.
	If RETURN is pressed from Adv. Adjust Menu:
MENU Pressing MENU displays the Main Menu screen.	■ Return to normal picture. Press to exit menu.
Picture	Example of a procedure
Audio Timer Lock Memory Card Memory Card Setup Depending on the signal being input, some items may or may not be adjustable and some functions may or may not be available.	Press to select the desired icon. Picture Audio Timer Lock Memory Card Estup

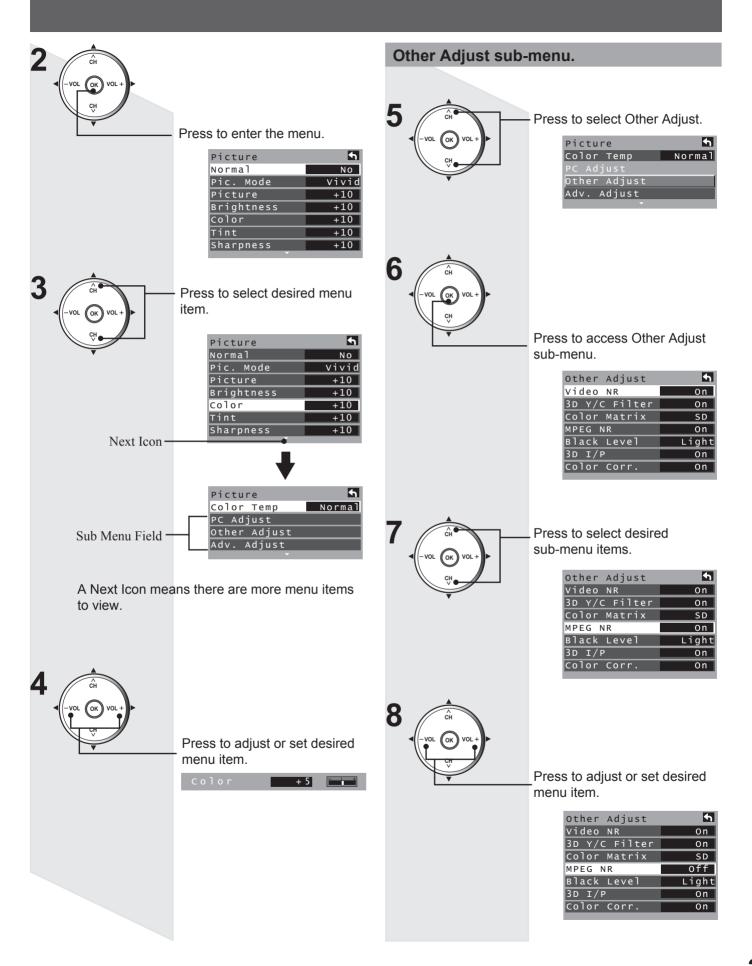

Tuning channels

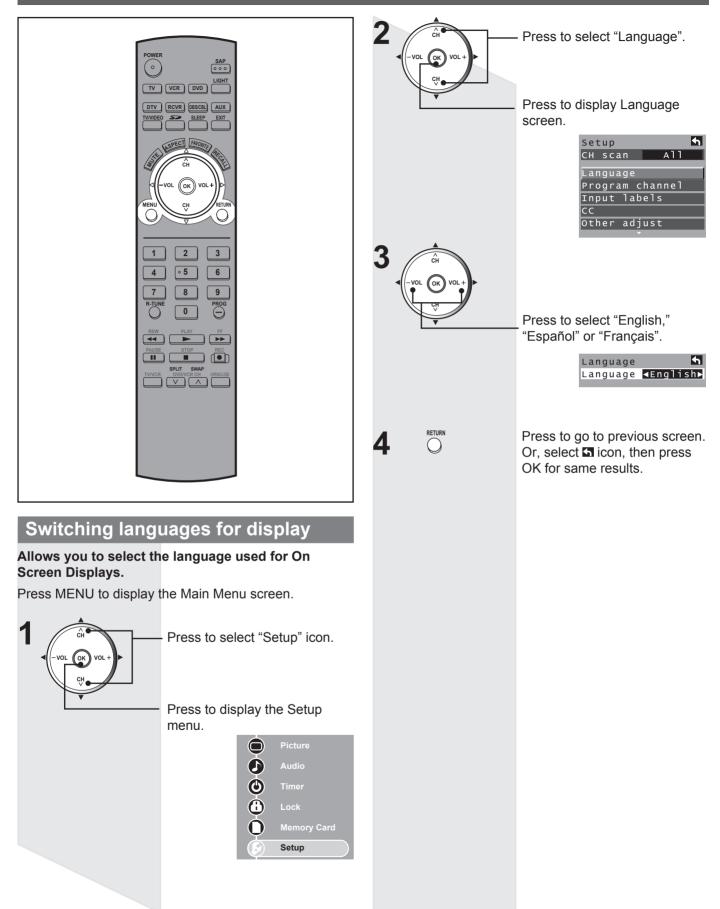

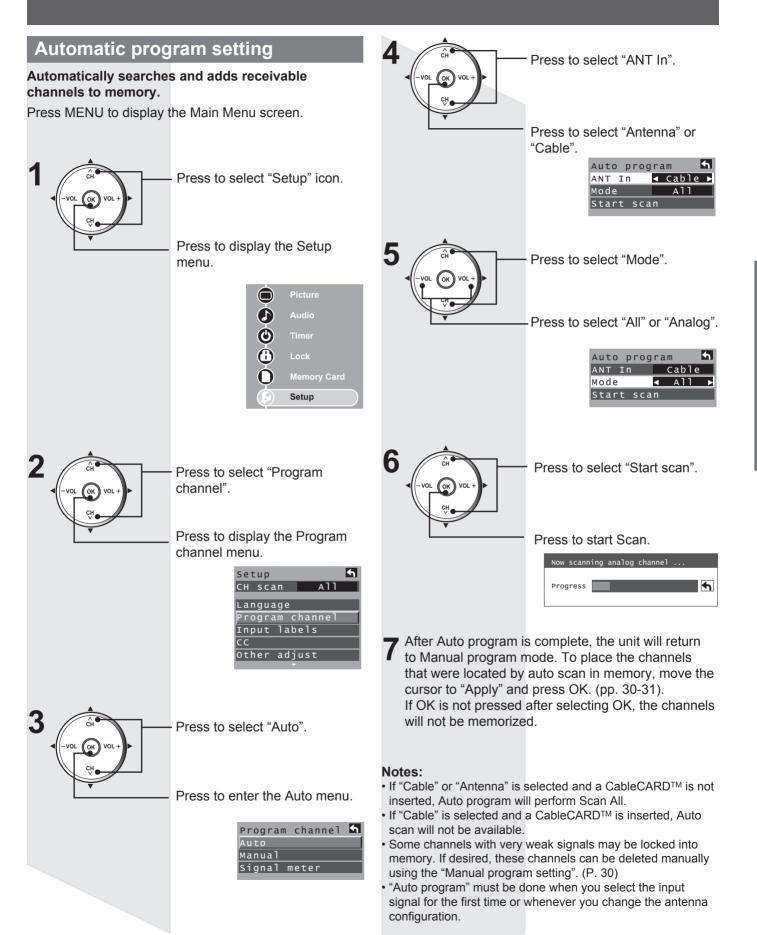


Tuning channels (continued)

Manual program setting

Use this procedure when changing setting of receiving channels or changing the channel display. Also, use to add or delete channels from channel list manually.

Press MENU to display the Main Menu screen.

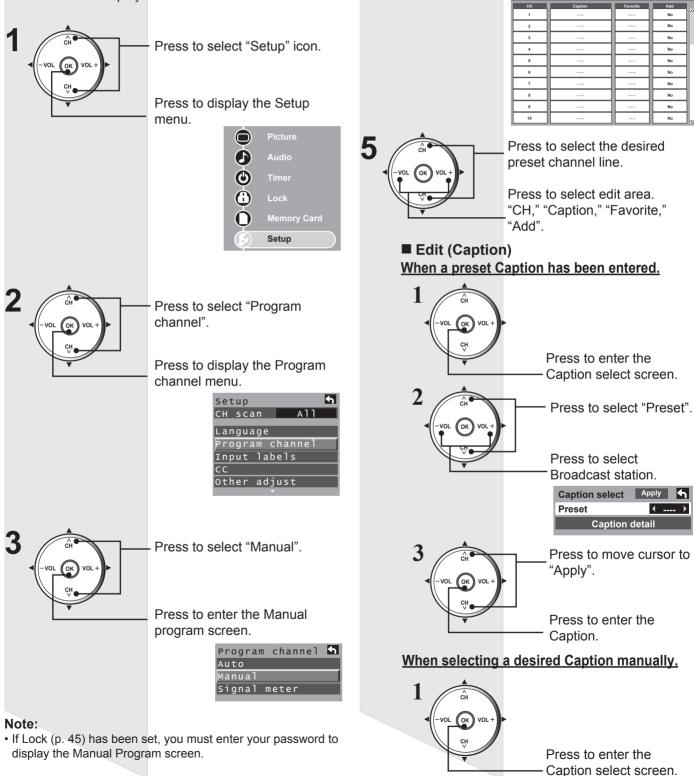

Δ

OK


CH

Press to select "Edit".

Press to enter the edit mode.

Edit

For assistance, please call : 1-888-VIEW PTV(843-9788) or, contact us via the web at: http://www.panasonic.com/contactinfo

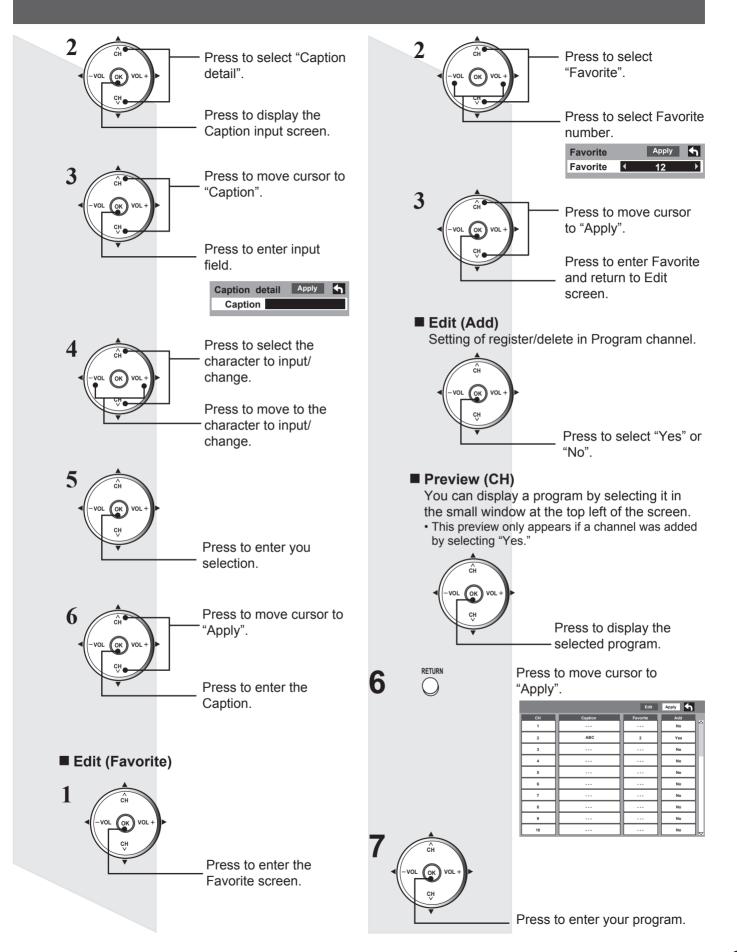

Projection Display operation



Selecting Input Mode


Press to display the Input select menu.

- Pressing TV/VIDEO while viewing PC input will place unit directly into TV input mode.
- Pressing TV/VIDEO while viewing Photo Viewer returns unit to last viewed channel or input mode.

2 1 2 3 4 ·5 6 7 8 9 0

TV/VIDEO

Press corresponding NUMBER key on the Remote Control to select the input of your choice.



Press to select the input of your choice, then press "OK".

 If, during selection, no action is taken for several seconds, the Input selection menu is exited and the current input is automatically selected.

	Input select		
	[1] TV		
	[2] Component 1		
	[3] Component 2		
	[4] Component 3		
	[5] HDMI 1		
	[6] HDMI 2		
	[7] Video 1		
	[8] Video 2		
	[9] Video 3		
	[0] PC		
1	Signal of source connected to		
	COMPONENT VIDEO INPUT 1 is displayed.		
	Signal of source connected to		
2	COMPONENT VIDEO INPUT 2 is displayed.		
3	Signal of source connected to		
	COMPONENT VIDEO INPUT 3 is displayed.		
	Signal of source connected to HDMI IN 1 is		
	displayed.		
	Signal of source connected to HDMI IN 2 is		
	displayed.		
	Signal of source connected to INPUT 1 is		

HDMI 1	Signal of source connected to HDMI IN 1 is displayed.
HDMI 2	Signal of source connected to HDMI IN 2 is displayed.
Video 1	Signal of source connected to INPUT 1 is displayed.
Video 2	Signal of source connected to INPUT 2 is displayed.
Video 3	Signal of source connected to INPUT 3 is displayed.
PC	Signal of source connected to PC IN is displayed.

Note:

Component

Component

Component

• If SKIP is set as the Input Label setting, the mode will not be changed. (P. 55).

■ Card input mode (Photo Viewer) is selected.



Press to display Photo Viewer mode.

Photo (Photo
Viewer)Signal of source connected to CARD SLOT
is displayed.

Rapid Tuning

Switches between the current and last channel or input modes.



Press to switch to previously viewed channel or input modes.

Note:

• When Photo Viewer (p. 49) or Split screen (p. 37) is used, Rapid Tuning is not available.

Using the CH/VOL Button

Select desired channel:

Press CH AV or NUMBER keys.

Adjust to desired volume level:

Press VOL + or VOL -.

Notes:

- The channel number and volume level are stored even after. the unit is turned off.
- Power consumption can be reduced if the volume level is lowered.

Channel and Program Tuning

Channel and Program tuning in digital television differs from conventional television. With DTV, many programs can exist within a single 6 MHz channel. These channels behave as sub-channels within a single channel. When tuning to a digital channel, the unit will also tune to a program and will indicate the channel and program in the on-screen Channel Banner display.

In order to select channels properly, Auto program must be performed (P. 29).


Follow the procedure below to directly enter the channel number using the NUMBER keys on the Remote Control.

Select analog channel

1 2 3 4 ○ 5 6 7 8 9 0

Press the NUMBER keys on the Remote Control to enter the Channel

number. Press OK. The following is an example of tuning to channel 15.



Direct Tuning Example

Step	Action	Channel Banner Display
1	Press 1	1
2	Press 5	15
3	Press OK	15

Note:

 If, during channel selection, no action is taken for several seconds, the Channel Banner is exited and the currently input channel is automatically selected.

Select digital channel



If tuning a digital channel and your channel contains more than one program, press PROG and enter the program (1, 2, 3 etc.) using the NUMBER keys. Press OK. The following is an example of tuning to channel 15-1.

3	4 °5 6 7 8 9 0	
4		

·5 6	Step	A
89	1	Р
0	2	Р
	3	P
CH CH	4	Р
	5	Pre

1 2 3	Direct Tuning Example		
4 .5 6	Step	Action	Channel Banner Display
7 8 9	1	Press 1	1
0	2	Press 5	15
•	3	Press -	15-
CH CH	4	Press 1	15-1
	5	Press OK	15-1

Note:

 If, during channel selection, no action is taken for several seconds, the Channel Banner is exited and the currently input channel is automatically selected.

Unit Status display

Press the Channel AV or RECALL button, except when the MENU screen is displayed, to display current unit status information.

Channel Banner: Minimized



Press CH AV to minimize the displayed channel banner. It will display the channel number, and the station identification (if available).

Channel Number



Station identifier

Note:


 The Station identifier is not displayed when you use Split Screen mode.

Channel Banner: Maximized



Press RECALL to maximize the displayed channel banner.

Channel, Program and Station identifier



Projection Display operation (continued)

Audio Mute

Press MUTE to instantly mute the sound. Press again to restore the previous sound level.



Press this button to mute the sound. Press again to reactivate sound. Sound is also reactivated when power is turned off or volume level is changed.

Note:

The audio output from AV OUT is not muted.

Favorite Feature

This feature lets you add channels to or delete channels from the Favorite channel list.


Set Favorite Feature


Display the channel to be placed on the Favorites list.



Hold down FAVORITE for several seconds.

 Press FAVORITE repeatedly to change between pages (1/3, 2/3, 3/3, or exit). Pressing ◄► also changes the page.





Press $\blacktriangle \lor$ to highlight a position on the list.

Then, press OK to memorize the displayed CH in that position.

• You can also use the NUMBER keys (1-9 and 0) to select the recorded list numbers (1-9 and 0). By doing so, the numbers will be directly recorded without having to press the OK key.

Setting 1/3
[1] 26-1
[2]
[3]
[4]
[5]
[6]
[7]
[8]
[9]
[0]

To delete a favorite channel

A memorized channel can be removed from the list by holding down FAVORITE while it's position is highlighted.


Use Favorite Feature



Press FAVORITE.

 Press FAVORITE repeatedly to change between pages (1/3, 2/3, 3/3, or exit). Pressing ◀► also changes the page.

Favorite 1/3
[1]
[2]
[3]
[4]
[5]
[6]
[7]
[8]
[9]
[0]



3

Press ▲ ▼ or a Numbered key (1-9 and 0) to highlight a channel on the list.

• Selecting a channel number from the list with the Number keys and then pressing OK will display the channel directly.

Press OK to display the highlighted channel.



Select Audio Mode for TV Viewing

Digital mode



Press SAP to select the next audio track (if available) when receiving a digital channel.




Analog mode



Press SAP button to select the desired audio mode as described below.

- (Arrow shows selection.)
- Each press of SAP button will change the audio mode as shown below.
- "SAP" is selected with first press of SAP button.





Receivable Broadcast Types

The following are possible broadcast types with their accompanying on-screen displays. The signal being received is indicated with a red text while the selected audio mode is yellow back ground.

MTS Stereo and SAP broadcast

Multi-channel Television Sound Stereo (main language) and Secondary Audio Program (sub language) broadcasts are both being received simultaneously. Select the STEREO or SAP audio mode.

MTS Stereo broadcast

Multi-channel Television Sound Stereo broadcast. Select STEREO audio mode.

• If stereo broadcast is weak and the display flickers, select MONO audio mode for possibly better results.

SAP broadcast

Secondary Audio Program (sub language.) Select SAP audio mode for the sub language.

MONO broadcast

Normal monaural sound broadcast.


Sleep Timer Feature

Switches the unit OFF in a preset amount of time from 0 to 90 minutes in 30 minute intervals.



Press SLEEP repeatedly to select the desired time.

 To cancel, press SLEEP repeatedly until 0 appears. Also, turning Power OFF while setting SLEEP will reset to zero.




- Pressing RECALL with sleep timer set displays remaining time. This can also be done by pressing SLEEP. If you continue to press SLEEP, the sleep time setting mode will be entered.
- Sleep time may also be set from the Menu screen. (P. 44).
- The on-screen display will flash 3, 2 and 1 to indicate the last three (3) remaining minutes prior to turn off.

ASPECT Controls



Changing the aspect mode

Lets you choose the aspect depending on the format of the received signal and your preference.






Notes:

- When a 1080i or 720p signal is being received, the mode is
- set to FULL, and aspect switching is not available.
- When input mode is CARD, the mode is set to 4:3, and aspect switching is not available.
- · If the mode selected does not match the aspect ratio of the input signal, the original picture quality may be affected.
- · If using this Projection Display in places, such as cafes or hotels, with the aim of displaying programs for a commercial purpose or for public presentation, please note that by using the aspect ratio (16:9) selection function to change the aspect ratio, you may be infringing on the rights of the original copyright owner of that program under copyright protection laws.
- If a 4:3 picture is projected in wide screen, distortion may occur around the edges so that part of the picture may no longer be visible. We recommend viewing in 4:3 mode so you can enjoy the picture as it was intended to be seen.

Mode	Picture	Explanation
JUST		JUST mode will display a 4:3 picture at maximum size but with aspect correction applied to the center of the screen so that elongation is only apparent at the left and right edges of the screen. The size of the picture will depend on the original signal.
4:3		4:3 will display a 4:3 picture at its standard 4:3 size.
ZOOM		ZOOM mode magnifies the central section of the picture.
FULL		FULL will display the picture at its maximum size but with sight elongation.

For assistance, please call : 1-888-VIEW PTV(843-9788) or, contact us via the web at: http://www.panasonic.com/contactinfo

Split screen

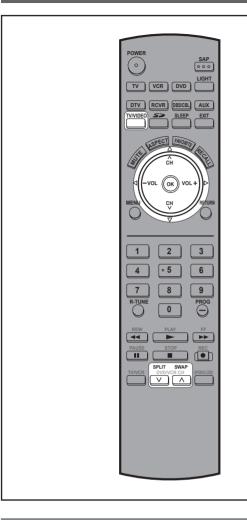

Returning to one screen (Left screen)



Press to return.

Notes:


- Sound from the Left screen is output from the speakers on the Projection Display set.
- When the screen is split, signal of the Left screen is output from the rear monitor output terminal. (P.17).
- The left and right screens are processed by individual circuits and, therefore, may vary in image quality.
- Split screen returns to single screen when the unit is turned off.
- The right and left screens essentially cannot display the same picture at the same time.
- Photo Viewer cannot be displayed using the Split screen function.
- The aspect mode can not be changed using the Split screen function.

Caution when HDMI/PC is input

- An HDMI signal and a PC input signal cannot be displayed at the same time on the left and right sides of the screen.
- An HDMI 1 input signal and an HDMI 2 input signal cannot be displayed at the same time on the left and right sides of the screen.

Changing the channel

The channel on the TV display side of the screen can be changed.



Press to select the desired channel.

Example: During SPLIT SCREEN NORMAL





Note:

 If neither the left or right screen is displaying TV, pressing CH buttons places the left screen in TV mode.

Splitting the screen



Press to split. (The previously selected screen appears on the left.)










(Example: PC input)

Split screen (continued)

Select desired input mode of the Right screen





* If SKIP is set as the Input Label setting, the mode will not be changed. (P. 55).

Swapping left and right screens



Press to swap.





Note:


 Picture quality may change according to the combination of signals input to the left and right screens.

Picture Adjustments



Press N	IENU to display	the Main Menu screen.
		 Press to select "Picture" icon.
	Ţ	Press to display the Picture menu.
\bigcirc	Picture	
	Audio	
٢	Timer	
Ġ	Lock	(PC input menu)
O	Memory Card	Menu
\mathbf{O}	Setup	Picture Audio
Picture Menu is inaccessible when no signal is present.		

Normal / Picture / Brightness / Color / Tint / Sharpness / Color Temp



Press to select each item.

-Press to adjust each item.

Picture	5
Normal	NO
Pic. Mode	Vivid
Picture	+10
Brightness	+10
Color	+10
Tint	+10
Sharpness	+10
~	


Picture	5
Color Temp	Normal
PC Adjust	
Other Adjust	
Adv. Adjust	
~	

ltem	Explanations
Normal	Resets all picture adjustments to factory default settings.
Picture	Adjusts white areas of picture.
Brightness	Adjusts dark areas of picture.
Color	Adjusts desired color intensity.
Tint	Adjusts natural fresh tones.
Sharpness	Adjusts clarity of outline detail.
Color Temp (temperature)	To increase or decrease Warm (red) and Cool (blue) colors to suit personal preferences.

Picture Adjustments (continued)

Picture Mode

Lets you choose one of three pre-set Picture Modes that best suits the program to which you are viewing. Selecting this feature will also affect Color Temperature setting.



Picture	•
Normal	NO
Pic. Mode	Vivid
Picture	+10
Brightness	+10
Color	+10
Tint	+10
Sharpness	+10
· · · · · · · · · · · · · · · · · · ·	

- Vivid This is the default mode, It provides enhanced picture contrast and sharpness for viewing in a well-lit room.
- Standard Recommended for normal viewing conditions with subdued room lighting.
- Cinema Select this mode for watching movies in a darkened room. It provides a soft, film-like picture.

PC Adjust

You can adjust the picture when viewing a signal from a PC.

Press to select "PC Adjust".

Press to display the PC Adjust menu.

Normal



Press	to	SP	lect	each	item	

Picture Color Temp

PC Adjust Other Adjus Adv. Adjust

Press to adjust each item.

PC Adjust	•
Normal	NO
Dot Clock	+10
H-Position	+10
V-Position	+10
Clock Phase	+10
Signal	VGA400

Item	Explanations	
Normal	Resets all picture adjustments to factory default settings.	
Dot Clock	Adjusts horizontal size.	
H-Position	Adjusts horizontal position.	
V-Position	Adjusts vertical position	
Clock Phase	Adjust in order to remove any picture interference or contour blurring which may occur in computer images.	
Signal	Display input signal.	

Note:

2

• This function is available only when the signal being viewed is from a PC.

Depending on the signal being input, some menu items may or may not be adjustable and some functions may or may not be available.


Other Adjust Item **Explanations** 3D I/P Film media (taken at 24 frames per second) is faithfully reproduced on the unit. Other detailed picture adjustments can be made. Recordings created at 24 frames per On[.] second are shown in higher quality. Off: Set to Off if picture appears unnatural. Press to select "Other Adjust". Color Corr. With HDMI connection, depending on the signal, the picture may be displayed with unnatural colors (as if red and blue are Press to display the Other reversed). Correct by setting the Color Corr. to Adjust menu. "On." Picture Color Temp Normal Other Adjust **Advanced Adjust** Adv. Adjust Highly-detailed adjustments can be made. Press to select each item. Press to select "Adv. Adjust." Press to adjust each item. 4 Other Adjust Video NR On Press to display the Advanced 3D Y/C Filter On Color Matrix SD Adjust menu. MPEG NR On Picture Black Level Light Color Temp Normal 3D I/P Оn PC Adjust <u>Color Corr</u> On Adv. Adjust Item Explanations Video NR Reduces noise, commonly called snow. Leave Press to select each item. off when receiving a strong signal. 3D Y/C Minimizes noise and cross-color in the picture. Filter Color Select SD or HD. Press to adjust each item. Matrix SD : When the input signal is a normal TV 4 system (NTSC). Adv. Adjust • HD : When the input signal is a High-Definition Normal NO Gamma Adj. Full system (ATSC). Blk. Extension +10Displays 480p input signals in natural color R Level +10from digital equipment adapters connected Level +10 to COMPONENT VIDEO INPUT (Y, PB, PR) B Level +10 terminals, HDMI INPUT terminals and DTV INPUT terminals. Item **Explanations** Select HD or SD to adjust color parameters Resets all picture adjustments to factory automatically for HD (high definition) or SD Normal default settings. (standard definition). The median brightness level of the Notes: Gamma Adj. picture can be set. • This feature is available only with 480p signal You can adjust the gray level of black for and not available with regular TV (NTSC) areas of the screen that are darker than **Blk Extension** program. · When viewing a nonstandard DTV signal the median level. Adjusts the red component. (PC input format, you can change color parameters R Level onlv.) manually for the best picture quality. Adjusts the green component. (PC input MPEG NR Unique noise to DVD, STB, etc. will be reduced. G Level only.) Black level Select Light or Dark [Dark : Analog channel/ Adjusts the blue component. (PC input VIDEO/480i, Light: 480P/720P/1080i] **B** Level

Invalid for Digital channel, PC and Photo Viewer.


only.)

Audio Adjustments



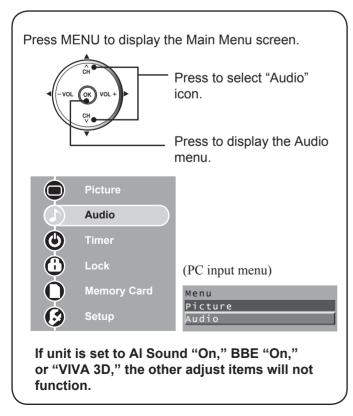

Normal / Bass / Treble / Balance



Press to select each item.


Press to adjust each item.

Audio	5
Normal	NO
Audio Mode	Standard
Bass	+10
Treble	+10
Balance	+10
BBE	off
Other Adjust	

Item	Explanations	
Normal	Reset Bass, Treble and Balance adjustments to factory default settings.	
Bass	Increase or decrease the bass response.	
Treble	Increase or decrease the treble response.	
Balance	Emphasize the left / right speaker volume.	

Audio Mode

Lets you choose one of three pre-set Audio Modes that best suits the program to which you are listening.



Press to select "Audio Mode".

Press to select audio mode.

Audio	5
Normal	NO
Audio Mode	Standard
Bass	+10
Treble	+10
Balance	+10
BBE	Off
Other Adjust	

 Standard Emits the original sound. Dynamic


- Sound suited to music or movie.
- Speech
- Sound suited to dialogue.

Depending on the signal being input, some menu items may or may not be adjustable and some functions may or may not be available.

2

BBE

You can hear a deeper, 3-D sound effect using just the unit's two front speakers.



Press to select "BBE".


Press to select BBE setting.

Audio	4
Normal	NO
Audio Mode	Standard
Bass	+10
Treble	+10
Balance	+10
BBE	Off
Other Adjust	

- VIVA 3D BBE VIVA 3D - BBE VIVA provides a musically accurate natural 3D image with hi-fi sound. The clarity of the sound is improved by BBE while the width, depth and height of the sound image are expanded by BBE's proprietary 3D sound processing. BBE VIVA is compatible with all TV programs including news, music, dramas, movies and sports as well as electronic games. BBE VIVA enhances the surround sound effect, while maintaining the clarity of dialogue.
- On BBE - Sound technology enhances speech intelligibility and restores the dynamic range of musical passages to provide outstanding natural sound.
- Off Sound is normal.

Other Adjust

Other detailed audio adjustments can be made.



Adju	st menu.	
	Audio	4
	Normal	NO
	Audio Mode	Standard
	Bass	+10
	Treble	+10
	Balance	+10
	BBE	Off
	Other Adjust	

Press to select "Other Adjust".

Press to display the Other

Press to select each item.

Press to adjust each item.

Other Adjust	5
AI Sound	On
Surround	On
Speakers	On
HDMI 1 In	Auto
HDMI 2 IN	Auto


Item		Explanations
AI Sound	Equalize overall volume levels across all channels. (Al sound is not available in VIDEO mode).	
Surround	Enhances audio response when listening to stereo.	
Speakers	This feature is used to turn TV speakers On or Off. • On - TV speakers operate normally. • Off - TV speakers off.	
HDMI1 In /		
HDMI2 In	and digital audio input when using the HDMI terminals.	
	Auto :	Automatically performs digital/ analog input switching according to the input signal type.
	Digital :	Forces use of digital audio input signal transmitted via the HDMI terminals.
	Analog :	Forces use of analog audio input signal transmitted via separate RCA terminals.

Notes:

- Sound signals are output from the rear AUDIO OUT and DIGITAL AUDIO OUT terminal. (PP. 18-19).
- When volume is adjusted or the MUTE button is pressed from the Remote Control, a message will be displayed.


Sleep Timer Feature



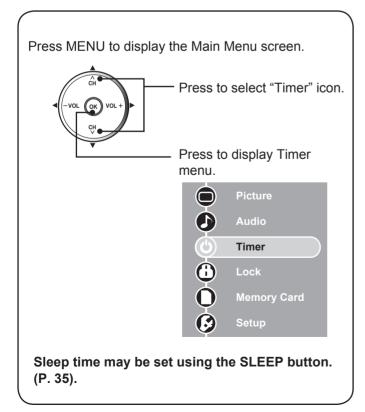

Set Sleep Timer

Press to set unit to shut itself off after a preselected amount of time.



Press to select "0," "30," "60," or "90".

Timer			4
sleep	•	60	Þ

Notes:

- Pressing the RECALL button with sleep timer set displays remaining time.
- The on-screen display will flash 3, 2 and 1 to indicate the last three (3) remaining minutes prior to turn off.


Lock Feature

	POWER SAP SOCO LIGHT TV VGR DVD LIGHT DVV RCVR DSCB ALIX TV/10E0 SP SLEP ENT CH CH VOL CH REVU CH CH SCURN REVURN CH CH CH	This Projection Display incorporates V-CHIP technology to block the viewing of movies and television programs according to the rating category. There are four (4) Content Advisory Categories: MPAA (Motion Picture Association of America), TV Parental Guidelines Ratings, Canadian English Language Ratings and Canadian French Language Ratings. These categories are used as guidelines for blocking the programs. The default mode for the Lock category is the Unlocked state. In this state, you can surf the various categories of the Lock menu. After you have created a password, you are prompted to enter it before you can make any changes in the Lock menu.
		Enter Secret Code
		A 4-digit code must be entered to view a blocked program or change rating settings.
	7 8 9 RTUNE 0 PROG	
	PLAY PLAY PAUSE PAUSE STOP PAUSE STOP PAUSE STOP PAUSE STOP PAUSE STOP PAUSE STOP PAUSE STOP PE PAUSE STOP PE PE PE PE PE PE PE PE PE P	 Create Secret Code (First Time Setting) 2 3 4 • 5 6 7 8 9 O Use a code that is easy to remember and record it in a safe place.
		Create password.
		Enter new password, again.
,		
	Press MENU to display the Main Menu screen.	Upon entering the 4 digit code,
		the Lock menu is displayed.
	Press to select "Lock" icon.	Lock Mode d Off ► Channel Program Change password
	Press to display the options in the Lock menu.	Enter Secret Code
	Picture	1 2 3 Press NUMBER keys to enter your secret code.
	Audio	Enter password.
	U Timer	
	Memory Card Setup	Upon entering the 4 digit code, the Lock menu is displayed.
	Ý	Notes: • Once ratings are set, restricted tapes or programs cannot be
You will be asked to enter your password each time you display the Lock menu.		 accessed unless the secret code is entered. Do not forget your password. If you have forgotten it,
		please contact a service center.

Lock Feature (continued)

Lock Set

Select Lock mode to prevent viewing of video games, VCR tapes, channels and Video modes.




Lock ◀ off ► Mode ◀ off ► Channel Program Change password

To prevent video games, VCR tapes and all channels and video modes from being viewed. The available modes are:

- Off Turns off Lock set functions.
- All All channels are locked regardless of the rating level.
- Game Locks out CH 3, 4 and Video inputs.
- CH Locks out specific analog and digital channels. Password is required to view any of the locked channels.

Channel Lock (Block channel selection)


Select up to 7 (1-7) channels to be blocked out. These channels will be blocked out regardless of the program rating.

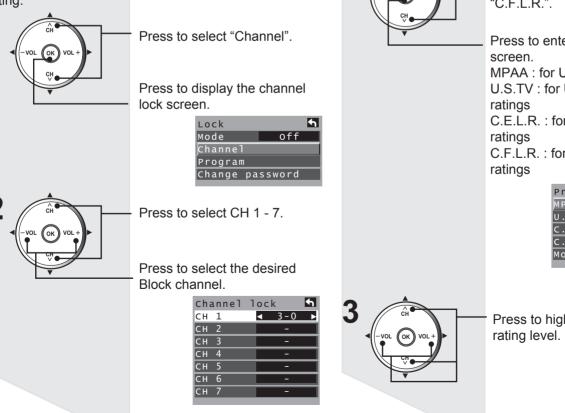


Block program

This television incorporates V-Chip technology to block the viewing of movies and television programs according to the rating category. There are four (4) Content Advisory Categories: MPAA (Motion Picture Association of America), U.S.TV Program, Canadian English ratings and Canadian French ratings. These categories are used as guidelines for blocking programs.

• The default mode for the Lock category is the Unlocked state.

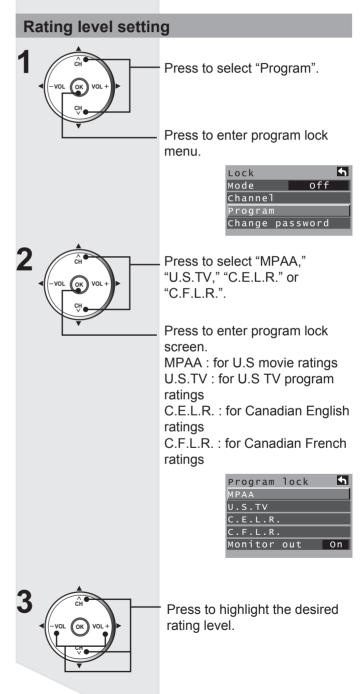

Monitor out setting

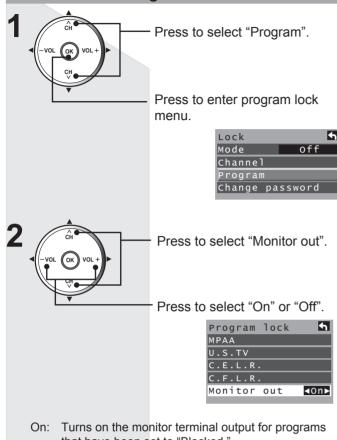

- that have been set to "Blocked."
- Off: Turns off the monitor terminal output for programs that have been set to "Blocked."

Notes:

- The Off rating is independent of other ratings.
- When placing a block on a specific age based rating level, the Off rating and any other more restrictive ratings will also be blocked.

U.S. M	IOVIES RATINGS CHART (MPAA)
Off	NO RATING (NOT RATED) AND NA (NOT APPLICABLE) PROGRAMS. Movie has not been rated or rating does not apply.
G	GENERAL AUDIENCES. All ages admitted.
PG	PARENTAL GUIDANCE SUGGESTED. Some material may not be suitable for children.
PG-13	PARENTS STRONGLY CAUTIONED. Some material may be inappropriate for children under 13.
R	RESTRICTED. Under 17 requires accompanying parent or adult guardian.
NC-17	NO ONE 17 AND UNDER ADMITTED.
Х	ADULTS ONLY.

U.S. TV PROGRAMS RATINGS CHART

The TV Parental Guidelines has 7 levels of age-based ratings that can be selected. These 7 levels are split into 2 age-based groups:

Youth Age-based Ratings and Guidance Age-based Ratings. Some of these age-based ratings can also have content-based ratings, denoted as D (Dialog), L (Language), S (Sex) and V (Violence). The table below shows the age-based ratings selection.

Age-	Age-	Blocked	Description
based	based	Content	
Group	Ratings	Selections	
NR	TV-NR	 Viewable 	Not Rated. See
(Not		 Blocked 	"Customer Caution" on
Rated)			page 48.
Youth	TV-Y	 Viewable 	All children. The themes
		 Blocked 	and elements in this
			program are specifically
			designed for a very young
			audience, including
			children from ages 2-6.
	TV-Y7	• FV (Fantasy	Directed to older children.
		Violence)	Themes and elements in
		 Viewable 	this program may include
		 Blocked 	mild physical or comedic
			violence, or may frighten
			children under the age
			of 7.
Guidance	TV-G	 Viewable 	General audience. It
		 Blocked 	contains little or no
			violence, no strong
			language, and little or
			no sexual dialogue or
			situations.
	TV-PG	• D,L,S,V (all	Parental guidance
		selected)	suggested. The program
		• Any	may contain infrequent
		combination	coarse language,
		of D, L, S, V	limited violence, some
			suggestive sexual
			dialogue and situations.
	TV-14	• D,L,S,V (all	Parents strongly
		selected)	cautioned. This program
		• Any	may contain sophisticated
		combination	themes, sexual content,
		of D, L, S, V	strong language and
			more intense violence.
	TV-MA	• L,S,V (all	Mature audiences only.
		selected)	This program may
		• Any	contain mature themes,
		combination	profane language,
		of L, S, V	graphic violence, and
-		<u> </u>	explicit sexual content.
		rtoon Violence.	
	olence		
	ex .		
L: O	ffensive La	anguage	

Offensive Language D : Dialogue with sexual content.

Lock Feature (continued)

CANADIAN ENGLISH RATINGS CHART

E	Exempt - Exempt programming includes: news, sports, documentaries and other information programming, talk shows, music videos, and variety programming.
С	Programming intended for children under age 8. No offensive language, nudity or sexual content.
C8+	Programming generally considered acceptable for children 8 years and over. No profanity, nudity or sexual content.
G	General programming, suitable for all audiences.
PG	Parental Guidance suggested. Some material may not be suitable for children.
14+	Programming contains themes or content which may not be suitable for viewers under the age of 14. Parents are strongly cautioned to exercise discretion in permitting viewing by pre-teens and early teens.
18+	18+ years old. Programming restricted to adults. Contains constant violence or scenes of extreme violence.

CANADIAN FRENCH RATINGS CHART

E	Exempt - Exempt programming.		
G	General - Programming intended for audience of all		
	ages. Contains no violence, or the violence content		
	is minimal or is depicted appropriately.		
8 ans +	8+ General - Not recommended for young children.		
	Programming intended for a broad audience		
	but contains light or occasional violence. Adult		
	supervision recommended.		
13 ans +	Programming may not be suitable for children under		
	the age of 13 - Contains either a few violent scenes		
	or one or more sufficiently violent scenes to affect		
	them. Adult supervision strongly suggested.		
16 ans +	Programming may not be suitable for children under		
	the age of 16 - Contains frequent scenes of violence		
	or intense violence.		
18 ans +	Programming restricted to adults. Contains constant		
	violence or scenes of extreme violence.		

Customer Caution

The V-Chip system that is used in this set is capable of blocking "NR" programs (non rated, not applicable and none) as

per FCC Rules Section15.120(e)(2). If the option of blocking "NR" programs is chosen "unexpected and possibly confusing results may occur, and you may not receive emergency bulletins or any of the following types of programming:"

- Emergency Bulletins (Such as EAS messages, weather warnings and others)
- Locally originated programming News Political Public Service Announcements • Religious • Sports
- Service Announcements Religious Spo

• Weather

Blocking Messages


Various Blocking messages are displayed on-screen depending upon the type of blocking you have selected in the Lock menu.

Notes:

- Entering the password will override the block condition. However, the ratings selection will be retained.
- Block cannot be canceled during Split Screen mode. Return to a single screen to cancel.

Message	Possible cause
Game locked.	The TV/VIDEO button was pressed when the Game lock had been selected.
Channel Locked.	Tuned to the designated channel when the Channel lock had been selected.
All locked.	Tuned to CH 3 or CH 4 when the Game lock had been selected. Lock all is selected.
Program locked.	Received program that exceeds the Block Program rating level.

Change password

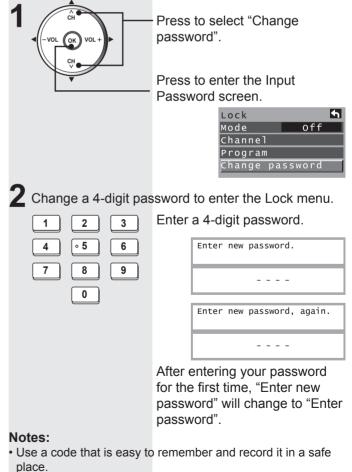

• Do not forget your password. If you have forgotten it, please contact a service center.

Photo Viewer

Still image data (JPEG) made with a digital camera or digital video camera can be played back using an SD Card.

WARNING

As with any small object, SD cards can be swallowed by young children. Do not allow children to handle the SD card.

- 1. Always insert card in the correct direction. Failure to do so may result in damage to the card and this unit.
- 2. The SD Card is precision devices. Do not subject them to excessive pressure or strong impacts.

Card Data Protection

- Do not remove the card while it is being accessed.
- Do not touch the terminals on the back of the SD Card.
- Electrical interference, electrostatic discharges and malfunctions of the unit or card may all result in damage to the card or data loss. It is recommended that any important data also backed up on a PC.
- Stored data should be periodically backed up as a protection against data corruption, data loss or device malfunction. Please note that our company shall not accept any liability for damage or loss of stored data.

Displayable Image Formats:

Baseline JPEG (160 × 120 ~ 2 560 × 1 920 pixels)

Notes:

- Some parts of an image may not be displayed or the image may be displayed on a smaller scale depending on the size of the image.
- Only JPEG images can be displayed on this unit.


Insert/Remove the Card

A CAUTION

Do not remove the SD card while "Accessing" is being displayed on screen. Otherwise data may be lost or corrupted.

Insert the Card

With the SD logo facing upward, insert the Card horizontally into the SD Card Slot. The card is secured when you hear a click.



Remove the Card

Gently press in on the Card and release slowly. Pull the Card from the slot.




Press in lightly on SD Card, then release.

Note:

• Remove the Card carefully to prevent it from popping out of the slot too fast.


Photo Viewer (continued)

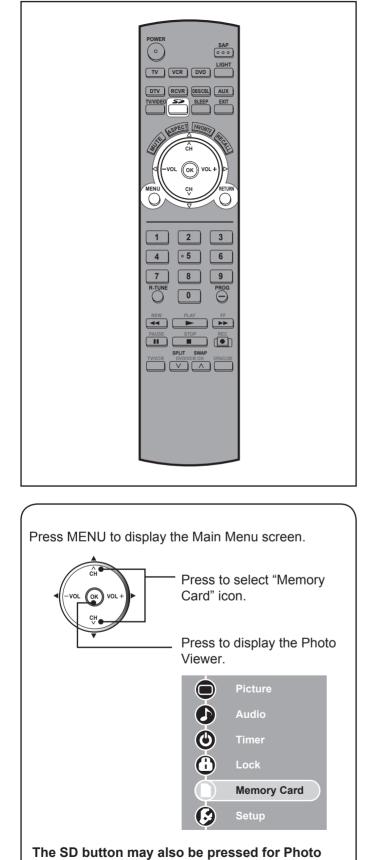

Viewer mode. (P. 32).

JPEG thumbnail

The screen below is displayed automatically while a card is inserted. If "Is memory card in?" appears, check if a card is inserted. If not, turn the unit power off, correctly insert a card, then turn the unit back on. Now, place unit into Photo Viewer mode.

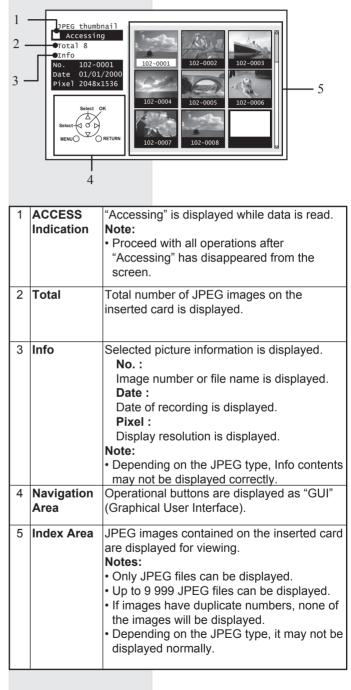


Card Warning Messages

If there is a problem with the card or card data, the following messages will appear.

Message	description
Is memory card in?	A card may not be inserted, or the card
	format may not be supported. (Use SD
	cards formatted in a digital camera.)
No file.	The card may not contain image data,
	or all images on the card may be
	incompatible.

Exit Photo Viewer


Pressing SD while a JPEG thumbnail is displayed redisplays the last viewed input.





Press SD to exit Photo Viewer.

Index Area Operation



Press to select icon.

Press to display full size file preview. (P. 52).



Notes:

File names will not be displayed correctly if...

- More than 8 characters are used.
- Spaces and special symbols are used. Use care when changing file names.

Photo Viewer (continued)

Single Play Mode

Press $\blacktriangle \lor \blacklozenge \lor$ to move cursor to desired file in INDEX AREA.

Press OK to display file in full screen size.





SINGLE VIEW SCREEN

Navigation Display

Pressing RECALL while in Single Play Mode displays or removes the Navigation Area screen.



Navigation Area

Change image

Pressing the \blacktriangle v buttons changes the displayed image.

Press ▲ : The previous image is displayed. Press ▼ : The next image is displayed.

Rotate image

Pressing the \triangleleft buttons rotates the image 90° at a time.

- Press ► : Each press right rotates image 90°.
- Press ◀ : Each press left rotates image 90°.

Note:

 Rotation settings are not written to the file and are canceled when Photo Viewer is exited.

Picture Adjustment

When MENU is pressed, the Picture Adjust menu (p. 39) is displayed.

Picture Adjust menu



Pressing RETURN to exit Picture menu.

Exit Single Play mode


Pressing RETURN during Single Play mode allows you to exit the mode.





Press RETURN with Single Play mode displayed to return to the JPEG thumbnail mode.

Slide Show Mode

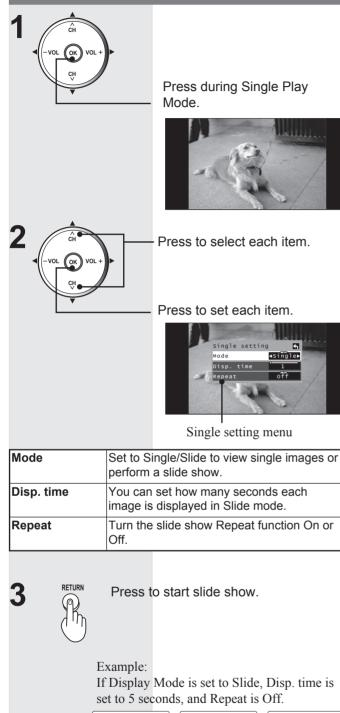







Displayed 5 seconds

Displayed 5 seconds

Stop

Press OK during a slide show to stop it. The Submenu is displayed.

Navigation Display

Pressing RECALL during Slide Show mode allows you to display or remove the Navigation Area.



Navigation Area

Exit Slide Show mode


Pressing RETURN during Slide Show mode allows you to exit the mode.





Press RETURN with Slide Show mode displayed to return to the Card Menu Screen.

Setup Features

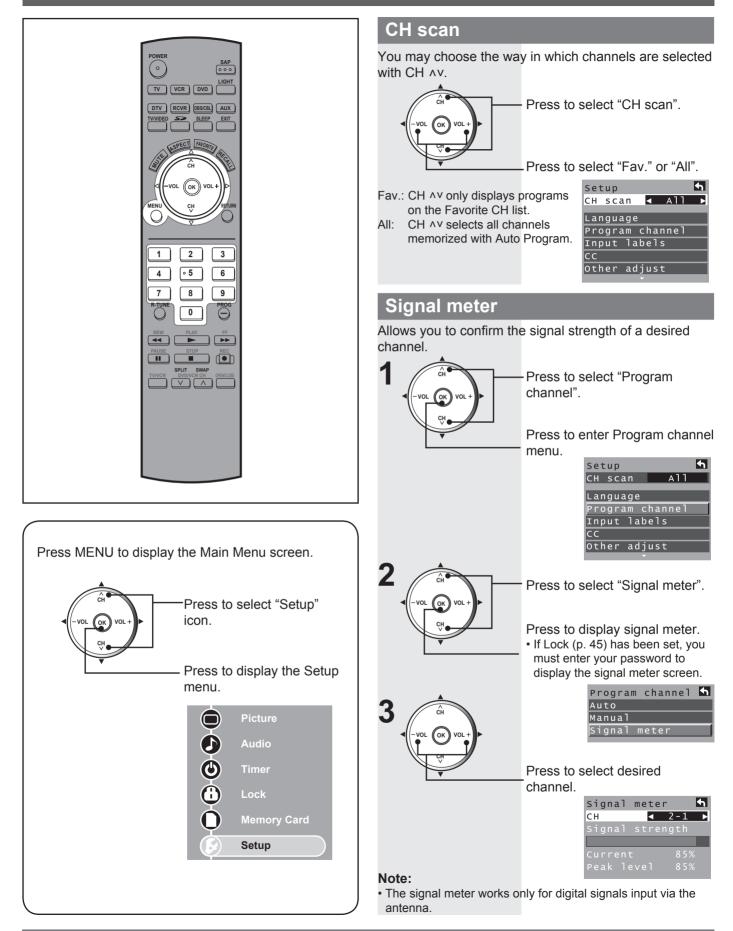

Input labels

To label video input connections for on-screen display.

· · · · · · · · · · · · · · · · · · ·	
	Press to select "Input labels".
Ţ	Press to enter the sub-menu field.
	Setup 🖣 CH scan All
	Language
	Program channel
	Input labels CC
	Other adjust
	Press to select the each item.
	 Press to select the input label. To skip the input, select "SKIP". The input will be skipped when you press TV/VIDEO.
	Input labels 🔄
	Comp. 1 < 🔹
	Comp. 2
	Comp. 3
	HDMI 1


Input	lab	els	•
Comp.	1	<	►
Comp.	2		
Comp.	3		
HDMI 1			
HDMI 2			
Video	1		
	_		

Selectable input labels :

SKIP, VCR, DVD, CABLE, DBS, PVR, GAME, AUX, blank (non label).

CC (Closed Caption)


The television includes a built-in decoder that is capable or providing a visual display of the audio portion. The program viewed must provide Closed Captioning (CC) for the television to display it.



Press	to	sel	ect	"CC"	-

Press to enter Closed Caption menu.

Set	up				4
СН	s c a	ιn		A11	
Lan	gua	ıge			
Pro	gra	ım (chan	nel	
Inp	ut	lal	bel		
СС					
Oth	er	ad	just		
			~		



Press to select "Mode".

Press to select the setting.

Analog

Digital

<u>CC</u> reset

off

CC1

Primary

<

Digital setting

CC Mode

- Off: Recommended mode when Closed Caption is not being used.
- On: To display Closed Captions.

Notes:

 The closed caption is not displayed when you use HDMI connection. The closed caption is not displayed when you use Split Screen mode.

If analog connected equipment is used for displaying or recording, closed caption (CC) should be set On/Off on the connected equipment.


The CC mode setting of the TV will not affect the analog input. If a digital program is being output in analog format, the CC data will also be output in analog format.

If digital connected equipment is used for input, CC should be set "On" on either the connected equipment or the TV.

If CC is set "On" on both the connected equipment and the TV, captions from each unit will overlap.

CC Mode for Analog

Choose the closed caption service of Analog broadcasting.



CC Mode oft Analog CC1 < Digital Digital setting CC reset


CC1	For video related information that can be displayed (up to 4 lines of script on the screen, where it does not disturb the relevant parts of the picture). Script can be in any language.
CC2/CC3/CC4	Other modes used for video related information.
T1	Blanks out a large portion of the picture on the television screen, and displays program guide or any other information currently being transmitted.
T2/T3/T4	Other modes that display information and blank out a large portion of the picture of the TV screen.

Setup Features (continued)

CC Mode for Digital

The Digital Closed Caption menu lets you configure the way you choose to view the digital captioning.

	Press to select "Digital".
Ţ	 Press to select the setting. Primary, Second., Service 3, Service 4, Service 5, Service 6
	CC M Mode Off Analog CC1 Digital ■Primary Digital setting CC reset
igital settings	
lecting digital broadca	st service and viewing formats.

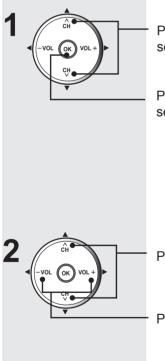

D Se


Press to select "Digital settings".

Press to enter the Digital setting menu.


СС	5
Mode	Off
Analog	CC1
Digital	Primary
Digital	setting
CC reset	

Press to select the each item.

Press to select the setting.



Size	Automatic, Normal, Small, Large
Font	Automatic, Default, Mono-serif, Prop-serif, Mono, Prop, Casual, Cursive, Small caps
Style	Automatic, None, Raised, Depressed, Uniform, Drop shadow




Foreground	The color of the font (Automatic, Black, White, Red, Green, Blue, Yellow, Magenta, Cyan)
Fore opacity	The opacity of the font (Automatic, Transparent, Translucent, Solid, Flashing)
Background	The color of the text box (Automatic, Black, White, Red, Green, Blue, Yellow, Magenta, Cyan)



Back	The opacity of the text box (Automatic,
opacity	Transparent, Translucent, Solid, Flashing)
Outline	The outline of the text (if selected under style) (Automatic, Black, White, Red, Green, Blue, Yellow, Magenta, Cyan)

CC Reset

Reset the CC settings.



Press to select "CC reset".

Press to reset Closed Caption settings.

сс	5
Mode	off
Analog	CC1
Digital	Primary
Digital :	setting
CC reset	

Other adjust (Setup)

You can set your preference as to the way the picture is displayed.

played.				sion and Software License.
		elect "Other Adjust".		 Press to select "About".
CH.	Adjust mer	splay the Other NU. etup A II		Press to display the About screen.
	L P I C	anguage rogram channel nput label C ther adjust		Press to select "Version" or "License".
	Press to se	elect each item.		Press to display "Version" or "License".
		ljust each item. adjust 🔄		About yersion License CableCARD
	Norma H-wid V-Siz	l ⊲ No⊾ th Shrink	Reset	
Item Normal	Explanations Resets all picture adju	stments to factory	Setup is reset.	
	default settings. If noise appears on the ends of the image in Shrink, switch to Enlarge. (Only JUST mode)	(Shrink) (Shrink) (Enlarge)		 Press to select "Reset". Press to display the password screen. Setup About Reset
H-Width	If noise appears on the ends of the image in Widen, switch to Narrow. (Only 4:3 mode	(Widen)	2 1 2 3 4 5 6 7 8 9 0 The confirmation scree	
	(Except PC input))	(Narrow)	Select "Yes", and press	s OK. ear all items set with Setup, such as

About

Display the TV set Version and Software License.


Remote Control Quick Reference Guide (Operating peripheral equipment)



Programming the Remote

The Universal Remote Control can be programmed to operate many manufacturers' components, using the component function buttons for other components. Follow the procedures for programming your Remote Control with or without a code for the component.

Setting up the remote using the numerical keys. (When code is known):



Confirm that the external component is plugged and operating. Turn the component off.

Press OK and POWER together, for at least 5 seconds.

RCVR DVD AUX

Press appropriate component button on the Remote Control.

3 1 2 3 4 °5 6 7 8 9 0

Enter the 3-digit component code using the Remote Control number keys (0 ~ 9 buttons). Press the Remote Control POWER to test the component. If the procedure was successful, the component will turn on.

Device	Operates	Default
TV	TV (Panasonic Only)	Panasonic Code
VCR	VCR (Preset)	Panasonic Code
DVD/CD	DVD and CD (Preset)	Panasonic Code
DTV	DTV (Panasonic Only)	Panasonic Code
RCVR	Audio Receiver (Preset)	Panasonic RCVR Code
DBS	DBS STB & CBL STB (Preset)	Panasonic DBS Code
CBL	Cable (Preset)	Panasonic CABLE Code
AUX	Personal Video Recorders, Cassette and VCR2	Panasonic Personal Video Recorder Code

Notes:


• Determine the manufacturer of the component and look in the table for the code.

• If the component does not operate with the Remote Control, repeat the procedure using another code. (Some brands have multiple codes). If an incorrect code is entered, or if the procedure takes longer than 30 seconds, the programming will fail.

Programming Without a Code

This procedure searches all codes and is called the "sequence method."

Setting to the remote using the step and set method (When code is not known):



Confirm that the external component is plugged in and on. Turn the component off.

Press OK and POWER together, for at least 5 seconds.




Press appropriate component button on the Remote Control.



Press VOL ► to move forward to the next code. Press VOL ◄ to move backward. Press the Remote Control POWER to test the component. If the procedure was successful, the component will turn on.

Note:

 Repeat the above steps until the component code is found. It may take many attempts before the correct code is found.




After the code is found, press OK to store the code.

Component Codes

The Universal Remote Control is capable of operating many component brands after entering a code. Some components may not operate because the codes are not available due to limited memory. The Universal Remote Control does not control all features found in each model.

Write the code numbers from tables in this space. This will serve as a reference if you need to program your Remote Control.

CABLE



Infrared Codes Index

The Remote Control is capable of operating many brands of peripheral equipment. Refer to page 58 and 59 for programming procedures.

Notes:

- The Remote Control memory is limited and therefore some models may not operate. The Remote Control is not designed to control all features available in all models.
- After entering the proper infrared code, press the desired Mode Selection button on the Remote Control. Refer to pages 9 and 62 to 64 for details on operating peripheral equipment using the Remote Control.

VCR Infrared Codes Index

VCR	
VCR	

Codes For VCR Brand Code		
Admiral	335	
Aiwa	332	
Akai	314, 315, 316, 329	
Audio Dynamic	311, 339	
Bell & Howell	305, 313	
Broksonic	320, 326	
Canon	323, 325	
CCE	343	
Citizen	306	
Craig	305, 306, 329	
Curtis Mathes	324, 345	
Daewoo	301, 324, 343	
DBX	310, 311, 339	
Dimensia	345	
Emerson	303, 319, 320, 325, 326, 343	
Fisher	305, 307, 308, 309, 313	
Funai	320, 326, 334	
GE	324, 333, 345	
Goldstar	306	
Gradiente	334	
Hitachi	300, 323, 345	
Instant Replay	323, 324	
Jensen	339	
JVC	310, 311, 334, 339	
Kenwood	306, 310, 311, 339	
LXI	300, 305, 306, 307, 308, 309	
Magnavox	323, 324, 331	
Marantz	310, 311, 339	
Marta	306	
Memorex	309, 324	
MGA	338, 340, 341, 347, 348	
Minolta	300, 345	
Mitsubishi	338, 340, 341, 347, 348	
Multitech	304, 347	
NEC	310, 311, 334, 339	
Olympic	323, 324	
Optimus	306, 321, 328, 335	
Orion	320. 326	
011011	321, 322, 323, 324	

Remote Control Quick Reference Guide (continued)

Codes For VCR		
Brand	Code	
Penney	300, 305, 310, 311, 324, 339, 345	
Pentax	300, 311, 345	
Philco	320, 323, 324, 326, 331, 343	
Philips	323, 324, 331	
Pioneer	323	
Proscan	300, 301, 302, 323, 324, 331, 333, 345, 346	
Quasar	321, 322, 323, 324	
Radio Shack	305, 309, 324, 333, 336, 340	
RCA	300, 301, 302, 323, 324, 331, 333, 345, 346	
Realistic	305, 309, 324, 336, 340	
Samsung	302, 304, 333	
Sansui	320, 326, 339, 352	
Sanyo	305, 309, 313	
Scott	301, 302, 304, 309, 320, 326, 338, 340, 347, 348	
Sears	300, 305, 306, 307, 308	
Sharp	335, 336	
Shintom	317	
Signature 2000	335	
Singer	337	
Sony	328, 329, 330	
Sylvania	323, 324, 331	
Tashiro	306	
Tatung	310, 311, 339	
Teac	310, 311, 339	
Technics	321, 322, 323, 324	
Teknika	324	
Toshiba	301, 346	
Vector Research	311	
Wards	306, 309, 335, 336, 344	
Yamaha	305, 310, 311, 339	
Zenith	306,344	

Codes For Cable Box		
Brand	Code	
Magnavox	133	
Memorex	130	
Movietime	105, 132	
Oak	102, 137, 139	
Panasonic	109, 110, 114	
Philips	106, 107, 128, 129, 130	
Pioneer	101, 116	
Pulsar	105, 132	
Puser	132	
RCA	115	
Realistic	132	
Regal	112, 118, 140, 141, 142, 145, 149	
Regency	134	
Rembrandt	105, 132, 137	
Samsung	105	
Scientific Atlanta	111, 112, 113	
Slmark	101, 105	
Sprucer	105, 110	
Stargate	105, 110	
Teleview	101, 105	
Texscan	144	
Tocom	135	
Toshiba	104	
Unika	125, 232	
Universal	122, 132	
Videoway	106	
Viewstar	129, 130	
Zenith	100, 117	
Zenith/.Drake Satellite	100	

DVD

Brand	Code	
Denon	100	
Ferguson	101	
JVČ	109	
Mitsubishi	105	
Nordmende	101	
Panasonic	100	
Philips	103	
Pioneer	102	
RCA	101	
Saba	101	
Samsung	110	
Sharp	108	
Sony	104	
Technics	100	
Thomson	101	
Toshiba	103	
Yamaha	100	
Zenith	107	

CABLE CONVERTER BOX and DVD, CD PLAYERS Infrared Codes Index

CBL DBS/CBL

Codes For Cable Box	
Brand	Code
ABC	124
Archer	125, 132
Cableview	105, 132
Citizen	105, 122
Curtis	112, 113
Diamond	124, 125, 132
Eagle	129
Eastern	134
GCbrand	105, 132
Gemini	122
General Instrument/ Jerrold	111, 119, 120, 121, 122, 124, 125, 126, 127
Hamlin	112, 118, 140, 141, 142, 145
Hitachi	103, 124
Macom	103, 104, 105

Codes For CD Player		
Brand	Code	
Admiral	226	
Aiwa	233, 235	
Carver	229	
Denon	242	
Emerson	239	
Fisher	205	
Harman/ Kardon	219, 220, 221, 223	
Hitachi	207	
Jensen	234	
JVC	240, 241, 245	
Kardon	223	
Kenwood	200, 201, 211, 245	
LXI/Sears	236	
Magnavox	229, 232	
Marantz	229	
McIntosh	221	
Nakamichi	210	
Onkyo	214, 215	
Optimus	208, 218, 220, 222	
Panasonic	224, 225, 227	
Philips	229, 230	
Pioneer	208	
Quasar	224, 225, 227	
RCA	231, 237, 238, 247	
Sansui	210, 246	
Sanyo	205	
Scott	210, 246	
Sharp	242, 243	
Sherwood	220	
Sony	228	
Soundesign	244	
Теас	212, 216, 218	
Technics	224, 225, 227	
Victor	240, 241, 245	
Yamaha	202, 203, 204	

CASSETTE PLAYERS, PERSONAL VIDEO RECORDERS, RECEIVERS, AMPLIFIERS, and DBS Infrared Codes Index



Codes For Cassette Decks	
Code	
223, 224, 225	
231	
203	
214	
229, 230	
200, 207	
202	
205	
208, 209, 213	
216, 218	
222	
	Code 223, 224, 225 231 203 214 229, 230 200, 207 202 205 208, 209, 213 216, 218

Codes For Cassette Decks		
Brand	Code	
Pioneer	204	
RCA	226, 227, 228	
Sansui	205, 210	
Sharp	231	
Sony	219, 220	
Teac	210, 211, 215	
Technics	216, 218	
Yamaha	201, 202	

Codes For Personal Video Recorders		
Code		
100		
102		
101		

RCVR RCVR

Codes For Receivers		
Brand	Code	
Admiral	120	
Aiwa	125, 126	
Denon	134, 135, 136	
Fisher	104	
Garrard	113	
Harman Kardon	115, 123	
Jensen	129	
JVC	132, 133	
Kenwood	100, 108	
Magnavox	127	
Marantz	124	
McIntosh	116	
Nakamichi	106	
Onkyo	109, 114	
Optimus	103, 127, 130, 131	
Panasonic	118, 119, 121	
Philips	123	
Pioneer	105, 107	
Quasar	118, 119, 121	
RCA	103, 105, 127, 130, 131	
Sansui	103, 111, 139	
Sharp	134, 137	
Sony	122	
Soundesign	138	
Teac	111, 112, 113	
Technics	118, 119, 121	
Victor	132, 133	
Yamaha	101, 102	

Remote Control Quick Reference Guide (continued)

DBS DBS/CBL

Codes For DBS		
Brand	Code	
Dish Network (Echostar)	105, 115, 116	
Echostar	105	
Express VU	105, 115	
G. E.	106	
G.I. (General Instrument)	108	
Gradiente	114	
Hitachi	103, 111, 112	
HNS (Hughes)	103	
Magnavox	101, 102	
Panasonic	104	
Philips	101, 102	
Primestar	108	
Proscan	106, 109, 110, 113	
RCA	106, 109, 110, 113	
Sony	107	
Star Choice	103, 108	
Toshiba	100	
Uniden	101, 102	

Operating Components with Remote Control

Note:

Refer to page 9 for programming Remote Control procedure.

Operating a VCR

Program the Remote Control to use with VCR.

TO DO THIS	PRESS
Turn on/off	POWER
Select TV Input mode for VCR	
Change Channels up/down	SPLIT SWAP DVD/VCR CH
Record	
Play	PLAY
Stop	STOP
Fast Forward	FF
Rewind the Tape	REW
Pause	PAUSE
Change to TV or VCR Mode	TV/VCR
On screen VCR Display	ARE THE

Operating a CABLE BOX

Program the Remote Control to use with Cable Box.

TO DO THIS	PRESS	
Turn on/off	POWER	
Select a Channel	1 2 3 4 ◦5 6 7 8 9 0 0	
Change Channels Up/Down		
Back to previous channel		

Operating a DBS

Program the Remote Control to use with DBS.

TO DO THIS	PRESS			
Turn on/off	POWER			
Display DBS menu	ОК			
Menu Navigation				
Select a Channel	1 2 3 4 •5 6 7 8 9 0 0			
Program Information	RECEIL.			
Back to previous channel				
Select next page up/down	SPLIT SWAP DVD/VCR CH			
Exit menus	EXIT			

Operating a DVD

Program the Remote Control to use with DVD.

TO DO THIS	PRESS
Turn on/off	POWER
Next/Previous Chapter	
DVD Display	ALC: ALC: ALC: ALC: ALC: ALC: ALC: ALC:
Skip Search Reverse	REW
Skip Search Fast Forward	FF
Record	
Play	
DVD Open/Close	OPENICLOSE
Stop	STOP
Still	PAUSE

Operating a Receiver

Program the Remote Control to operate audio receiver.

TO DO THIS	PRESS
Turn on/off	POWER
Audio Mute	and the second s
RCVR. VOI Up Down	
Tuner Pre-set stations Up/Down	
To select AV Inputs or Components:	Press Remote Control number keys AV1: Press 1 AV2: Press 2 AV3: Press 3 AV4: Press 4 CD: Press 5 TUNER: Press 6 PHONO: Press 7 TAPE: Press 8 AUX: Press 9
Surround VOL Down	REW
Surround VOL UP	FF
Center CH VOL Up/Down	SPLIT SWAP DVD/VCR CH

Operating a Cassette Deck

To operate a cassette deck, the Remote Control must be in AUX mode and be programmed with the appropriate code for your equipment.

TO DO THIS	PRESS		
urn on/off			
Receiver Volume Up/Down	A CH VOL (OK) VOL + CH CH ∇		
Deck A/B			
Record			
Play			
Stop	STOP		
Fast Forward	FF F		
Rewind the Tape	REW		
Pause	PAUSE		

Remote Control Quick Reference Guide (continued)

Operating a PVR (Personal Video Recorder)

Program the Remote Control to use with a PVR.

TO DO THIS PRESS			
Turn on/off	POWER		
Display PVR menu	MENU		
PVR Navigation			
Select a Channel	1 2 3 4 ◦5 6 7 8 9 0 0		
Play	PLAY		
Record	REC		
Pause	PAUSE		
Back to previous channel			
Exit menus	EXIT		
Replay Zones			
Quick Skip	OPENCLOSE		
Return to live	PROG		
PVR CH Up/Down	SPLIT SWAP DVD/VCR CH		

Notes:

Not all functions listed may be controllable.

• Some TV, Cable Box and DSS Receiver brands require you to turn on the power manually.

Warning Indicators

This unit has indicators (lights on the front) to let you know the unit's internal condition. (P. 10.) Depending on the condition, the Lamp, Power, or Temp indicator will flash to alert you. In this case, turn unit off and follow the measures below.

	Indicator	Symptom	Problem Possible Solution	
TEMP Indicator	Flashes red.	Power shuts off.	Internal overheat error.	Wait a while, then turn unit back on.
POWER Indicator	Flashes orange 1 times.	Power shuts off.	Malfunction 1.	Contact service center.
	Flashes orange 2 times.	Power shuts off.	Malfunction 2.	Contact service center.
	Flashes orange 3 times.	Power shuts off.	Malfunction 3.	Contact service center.
	Flashes orange 4 times.	Power shuts off.	Malfunction 4.	Contact service center.
	Flashes orange 5 times.	Power shuts off.	Malfunction 5.	Contact service center.
	Flashes orange 6 times.	Power shuts off.	Malfunction 6.	Contact service center.
	Flashes orange 8 times.	Power shuts off.	Malfunction 7.	Wait a while, then turn unit back on. If error persists, contact service center.
LAMP Indicator	Flashes red.	Power shuts off.	Lamp will not light or light is abnormal.	Try turning Power On several times. If error persists, contact service center.
	Light solid red.	OSD appears every time power is turned on.	Maximum Lamp life hours exceeded.	Replace Lamp

Note:

• If unit power is turned back on after performing the appropriate measures, make sure the unit has sufficiently cooled down. If the unit was used for a long period such that the lamp needs enough time to cool down, this may take a while.

Replacing the lamp unit

The lamp unit is sold separately. To purchase a replacement, call the Panasonic accessory department, toll free at: 1-800-332-5368. Lamp unit Part No. : TY-LA2005

Lamp unit replacement period

The Lamp is a consumable item and it's life varies based on individual usage. Panasonic warranties the original Lamp for a period of 18 months from the date of purchase of the TV. Replacing the lamp is so easy that you can do it yourself. For the lamp replacement procedure, please see the next page.

 The unit will detect when the Lamp's end of life is approaching and the message (shown at right) will be displayed.

THE LAMP NEEDS TO BE REPLACED, AND THE LAMP HOUR METER NEEDS TO BE RESET.

• The LAMP indicator light will be lit when the Lamp's end of life is approaching.

Influences of frequent lighting, continuous light use for over 24 hours, the number of times lit, the length of time between lightings, etc. may shorten lamp life. (Because of this, we recommend having a replacement lamp on hand.)

\Lambda WARNING

Failure to follow these warnings when replacing the lamp unit could result in personal injury:


- 1) The lamp could rupture if dropped and lamp fragments could cause injury.
- Because the lamp unit is hot immediately after its use, touching it may cause burns.
 Please allow the lamp to cool before handling or replacing the lamp unit.
- If replacement of the lamp unit becomes necessary during the operation of the Projection Display, follow the procedure below.
- a. Press the POWER button on the Remote Contro to turn off the power.
- b. Wait for about 1 minute until the cooling fan stops.
 The lamp cooling fan will continue to operate for about 1 minute after turning off the power. Do not unplug the power cord from the outlet until the fan has stopped. Avoid interrupting the power line by using circuit breakers or switchable power strips.
- c. After the cooling fan has stopped, Disconnect the power cord from the outlet.
- d. Please wait more than one hour to cool the lamp before replacing it.
- e. [If you need to replace the lamp more urgently]
 - The Projection Display has a forced cooling feature. After the POWER button is turned OFF, and during the first minute of the normal cooling fan operation, press the VOL+ button on the Projection Display and the ▲ button on the Remote Control at same time for more than 5 seconds. The cooling fan operates for about 10 minutes.

Because of the possibility of injury, strictly follow the replacement procedure on the next page.

This product has a High Intensity Discharge (HID) lamp that contains a small amount of mercury. Disposal of these materials may be regulated in your community due to environmental considerations. For disposal or recycling information please contact your local authorities, or the Electronics Industries Alliance: <http://www.eiae.org.>

Lamp replacement procedure

Turn power off, wait until power indicator stops blinking red, then disconnect the power cord from the wall outlet and confirm that the area around the lamp unit has cooled down.

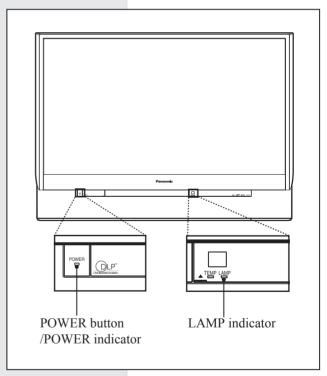


• Please wait more than one hour for lamp replacement. If you need to replace the lamp more urgently, please see "e" at left.

For assistance, please call : 1-888-VIEW PTV(843-9788) or, contact us via the web at: http://www.panasonic.com/contactinfo


2

Grasp both sides of the Front Cover with your fingertips and pull it from the Projection Display to remove it.




(1) Turn the Lock/Open Knob to the left.

(2) Pull the Lamp Cover out and down to open it.




- (1) Loosen the Lamp Unit Screw with a screwdriver.
- (2) Grasp the Lamp Unit Handle as shown in the diagram, and slowly remove the Lamp Unit from the Projection Display.



- Because the lamp unit is hot immediately after its use, touching it may cause burns.
- Please allow the lamp to cool before handling or replacing the lamp unit.

- **5** (1) Insert the new Lamp Unit being careful of the insertion direction.
 - Press on the arrow mark to make sure insertion is done correctly.
 - (2) Tighten the Lamp Unit Screw with a screwdriver.




Notes:


- Properly dispose of old lamp. Please see page 66.
- Attach the lamp unit and lamp unit housing door securely. If the lamp unit and lamp unit housing door are not attached securely, the protective circuit will be activated and the lamp will not turn on.

6 (1) Close the Lamp Cover.

(2) Turn the Lock/Open Knob to the right.



Replace the Front cover.



<u>After lamp replacement</u>, you must reset the lamp time. Refer to the instructions enclosed with the lamp unit (Part No.: TY-LA2005).

Before you call for service, determine the symptoms and make a few simple checks as shown below.

S	ymptoms	Checks	Page
Power does not turn ON.		 Is the power cord plugged in? The lamp cover is ajar. Firmly replace the cover.	
No picture even if the power is turned ON. LAMP indicator blinks red.		 Please replace lamp with a new one. Please consult your nearest dealer, if not still repaired. 	
The TEMP indicator		Check whether or not the vents are clogged.	
	flashes red.	 Is the set being used in a location that is hot? 	65
The power turns OFF.	Power turns off while another indicator is flashing.	Please consult your nearest dealer.	65
		Are the batteries dead or inserted incorrectly?	7
Remote Control of	does not function.	 Is the Remote Control sensor in direct light of fluorescent lamps or other strong sources of light? 	10
		Did you correctly set the Remote Control code?	58-64
Image shakes.		 Is the antenna or antenna cable old, broken or shorted? 	-
		 Is the antenna cable connected properly? 	12-14
Image is not clear. (blurring / vertical lines)			
		• Depending on the connected device, a 1080i input signal may cause the picture to flicker. If the connected device has a format selection switch, set the format to 720p.	
Color patches or no color.		• When using a VCR and selecting channels on the TV, is the TV/ VIDEO mode for the VCR set to TV?	
		 Is the antenna facing the right direction? 	-
Image appears doubled or tripled.		 Is the antenna receiving any signals reflected off of mountains or buildings. 	
Images disappear at the top and bottom of the screen.		 When using 16:9 image software, there is no picture at the top and bottom of the screen (cinema vision size software, etc.). 	-
During ZOOM me the top and botto	odes, the image is cut off at m.	Please adjust the V-Size. This is not a malfunction.	57
The Projection Display set makes a high whistling sound when the power is ON.		• This is the sound of the internal starting UP. This is not a malfunction.	-
Some parts of the screen are always lit while others do not light up. Some parts of the screen do not light up.		• This is a characteristic of the DMD and not a malfunction.	
Fan is operating even though TV Power is OFF.		• This is because the cooling fan is operating. The fan will stop after about 1 minute.	
	ng to replace the lamp is AMP indicator is lit red.)		
Relighting the lar sound.	np when it is hot makes a	• This is a characteristic of the lamp and not a malfunction.	
	th HDMI connection, ed with unnatural colors (as e reversed).	Change "Color Corr." from "Off" to "On".	41

Specifications

		P	PT-56DLX75	PT-61DLX75
Power Sour	rce	AC 120 V, 60 Hz		
Power Con	sumption	Power ON:Approx. 190 W (When audio is at maximum)Power OFF:Approx. 0.1 W (When cooling fan is stopped with no CableCARD™)		
	Element Size	0.8" (Aspect ratio: 16:9)		
DMD elements	Display method	Single Chip DMD) element, DLP™ system	
	No. of pixels	921 600 (1 280 ×	720) pixels	
Display		56-inch, 16 : 9 as	spect ratio	61-inch, 16 : 9 aspect ratio
Speaker		2 Speakers 30 W	/ [15 W + 15 W] (10 % THD)	
HID Lamp		100 W HID (High	0 W HID (High Intensity Discharge) Lamp	
Channel Ca (ATSC/NTS		VHF/UHF 2-69 Cable 1-135		
	PC INPUT	RGB analog 0.7 Vp-p (75 Ω) (D-SUB15P) AUDIO 0.5 Vrms (RCA Pin Jack × 2)		
Input	AV INPUT 1-3	VIDEO 1.0 Vp-p (75 Ω) (RCA Pin Jack) S-VIDEO Y : 1 Vp-p (75 Ω), C : 0.286 Vp-p (75 Ω) (Mini DIN 4 pin) AUDIO L-R 0.5 Vrms (RCA Pin Jack × 2)		
Terminals	COMPONENT VIDEO INPUT 1-3	Υ P ^B / P ^R AUDIO L-R	1.0 Vp-p (with sync) (75 Ω ± 0.35 Vp-p (75 Ω) (Pin Ja 0.5 Vrms (RCA Pin Jack ×	ack × 2)
	HDMI 1-2	HDMI type A Cor AUDIO L-R	nnector 0.5 Vrms (RCA Pin Jack T	Гуре × 2)
SD Card slo	ot	SD Card (8 MB/ 16 MB/ 32 MB/ 64 MB/ 128 MB/ 256 MB/ 512 MB/ 1 GB (Maximum))		
Output sign (AV OUT)	Dutput signalsVIDEO1.0 Vp-p (75 Ω) (RCA Pin Jack)AV OUT)AUDIO L-R0.5 Vrms (RCA Pin Jack × 2)			
Tuner		ATSC digital tuner with digital cable module		
	Dimensions (W × H × D) 1 314 mm (W) × 954 mm (H) × 458 mm (D) 51-3/4" (W) × 37-9/16" (H) × 18-1/16" (D) 1 424 mm (W) × 1 029 mm (H) × 468 m 56 1/16" (W) × 40 1/2" (H) × 18 7/16" (D)			
Weight (Ma	ss)	38.6 kg (84.1 lbs.) Net	41.5 kg (91.5 lbs.) Net
Operating o	conditions		°C – 35 °C (32 °F - 95 °F) · 80 % (non-condensing)	•

Note:

• Design and Specifications are subject to change without notice. Weight and Dimensions shown are approximate.

Cleaning

To ensure continued excellent performance by this product, periodic cleaning is recommended.

×	The unit contains many plastic parts. For this reason DO NOT use benzine, thinner or other chemicals to clean the unit.	Dust will accumulate on the picture screen. Please wipe with a soft cloth from time to time. If you use a chemically treated cloth, please be careful to follow the instructions that come with the cloth.
Image: Clean the unit. Image: Clean the uni		Remove dirt and soiling by wiping with a light cloth. Even if the unit is heavily soiled, do not apply cleaner directly to the unit. Soak a cloth in a solution of neutral cleanser diluted with water. Then wring out the cloth, wipe the unit clean, and finish by wiping with a dry cloth. Do not use any type of cleansers on the picture screen.

Customer Services Directory

Obtain Product Information and Operating Assistance; locate your nearest Dealer or Servicenter; purchase Parts and Accessories; or make Customer Service and Literature requests by visiting our Web Site at:

http://www.panasonic.com/consumersupport

or, contact us via the web at: <u>http://www.panasonic.com/contactinfo</u>

You may also contact us directly at: 1-800-211-PANA (7262), Monday-Friday 9 am-9 pm; Saturday-Sunday 10 am-7 pm, EST.

For hearing or speech impaired TTY users, TTY : 1-877-833-8855

Accessory Purchases

Purchase Parts, Accessories and Instruction Books online for all Panasonic Products by visiting our Web Site at: <u>http://www.pasc.panasonic.com</u>

or, send your request by E-mail to: <u>npcparts@us.panasonic.com</u>

You may also contact us directly at: 1-800-332-5368 (Phone) 1-800-237-9080 (Fax Only) (Monday – Friday 9 am to 8 pm, EST.) Panasonic Services Company 20421 84th Avenue South, Kent, WA 98032 (We Accept Visa, MasterCard, Discover Card, American Express, and Personal Checks)

For hearing or speech impaired TTY users, TTY : 1-866-605-1277

Service in Puerto Rico Panasonic Puerto Rico, Inc. Panasonic Sales Company Factory Servicenter: Ave. 65 de Infantería, Km. 9.5, San Gabriel Industrial Park, Carolina, Puerto Rico 00985 Phone (787)750-4300 Fax (787)768-2910

Limited Warranty

PANASONIC CONSUMER ELECTRONICS COMPANY, DIVISION OF PANASONIC CORPORATION OF NORTH AMERICA

One Panasonic Way Secaucus, New Jersey 07094

PANASONIC SALES COMPANY, DIVISION OF PANASONIC PUERTO RICO, INC., AVE. 65 de Infantería, Km. 9.5 San Gabriel Industrial Park, Carolina. Puerto Rico 00985

Panasonic Multimedia Projection HDTV Limited Warranty

Limited Warranty Coverage

If your product does not work properly because of a defect in materials or workmanship, Panasonic Consumer Electronics Company or Panasonic Sales Company (collectively referred to as "the warrantor") will, for the length of the period indicated on the chart below, which starts with the date of original purchase ("warranty period"), at its option either (a) repair your product with new or refurbished parts, or (b) replace it with a new or a refurbished product. The decision to repair or replace will be made by the warrantor.

CATEGORY	PARTS	LABOR	SERVICE
	One (1) Year except lamp Original Lamp-18 months	One (1) Year	In-Home or Carry-In

During the "Labor" warranty period there will be no charge for labor. During the "Parts" warranty period, there will be no charge for parts. You must carry-in your product or arrange for in-home service during the warranty period. If non-rechargeable batteries are included, they are not warranted. This warranty only applies to products purchased and serviced in the United States or Puerto Rico. This warranty is extended only to the original purchaser of a new product which was not sold "as is". A purchase receipt or other proof of the original purchase date is required for warranty service.

Carry-in or In-Home Service

For In-Home or Carry-In Service in the United States call 1-888-VIEW-PTV (1-888-843-9788). For assistance in Puerto Rico call Panasonic Sales Company (787)-750-4300 or fax (787)-768-2910. In-Home service requires clear, complete and easy access to the product by the authorized servicer and does not include removal or re-installation of an installed product. It is possible that certain in-home repairs will not be completed in-home, but will require that the product, or parts of the product, be removed for shop diagnosis and/or repair and then returned.

Limited Warranty Limits And Exclusions

This warranty ONLY COVERS failures due to defects in materials or workmanship, and DOES NOT COVER normal wear and tear or cosmetic damage. The warranty also does not cover damages which occurred in shipment, or failures which are caused by products not supplied by the warrantor, or failures which result from accidents, misuse, abuse, neglect, mishandling, misapplication, alteration, faulty installation, set-up adjustments, misadjustment of consumer controls, power line surge, lightning damage, modification, or commercial use (such as in a hotel, office, restaurant, or other business), rental use of the product, service by anyone other than a Factory Servicenter or other Authorized Servicer, or damage that is attributable to acts of God.

THERE ARE NO EXPRESS WARRANTIES EXCEPT AS LISTED UNDER "LIMITED WARRANTY COVERAGE". THE WARRANTOR IS NOT LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THIS PRODUCT, OR ARISING OUT OF ANY BREACH OF THIS WARRANTY. (As examples, this excludes damages for lost time, cost of having someone remove or re-install an installed unit if applicable, or travel to and from the servicer. The items listed are not exclusive, but are for illustration only.) ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTY OF MERCHANTABILITY, ARE LIMITED TO THE PERIOD OF THE LIMITED WARRANTY.

Some states do not allow the exclusion or limitation of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the exclusions may not apply to you.

This warranty gives you specific legal rights and you may also have other rights, which vary, from state to state. If a problem with this product develops during or after the warranty period, you may contact your dealer or Servicenter. If the problem is not handled to your satisfaction, then write to the warrantor's Consumer Affairs Department at the addresses listed for the warrantor.

PARTS AND SERVICE (INCLUDING COST OF AN IN-HOME SERVICE CALL, WHERE APPLICABLE) WHICH ARE NOT COVERED BY THIS LIMITED WARRANTY ARE YOUR RESPONSIBILITY.

This product utilizes the following so called "open source" software:

(1) the software which is licensed under the GNU GENERAL PUBLIC LICENSE,

(2) the software which is licensed under the GNU LESSER GENERAL PUBLIC LICENSE, and

(3) software developed by the third parties and available under certain terms and conditions.

For the software categorized as (1) and (2), please refer to the terms and conditions of the following GNU

GENERAL PUBLIC LICENSE and GNU LESSER GENERAL PUBLIC LICENSE respectively.

If you wish to get further information as to the software, please contact the web site below. <u>http://www.fsf.org/licenses/ and http://www.am-linux.jp/</u>

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright © 1989, 1991 Free Software Foundation, Inc. 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compalled to copy the source along with the object acde

compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance. 5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

Other Information (continued)

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR AMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and an idea of what it does.> Copyright © <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place - Suite 330, Boston, MA 02111-1307, USA

Also add information on how to contact you by electronic and paper mail. If e program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright 0 year name of author Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type 'show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program 'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989 Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright © 1991, 1999 Free Software Foundation, Inc. 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright then library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs. When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

Other Information (continued)

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.) These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law. If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)
- b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.
- c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
- e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable. It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library sideby-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
- b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

Other Information (continued)

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and an idea of what it does.> Copyright © <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library 'Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990 Ty Coon, President of Vice

That's all there is to it!

Index

1080i 480i 480p 720p	16, 23 16, 23
Α	-, -

ASPECT button	9, 36
ATSC	8
AUDIO OUT Terminal	19
Auto shut off	24

В

BBE	43
Blocking Messages	48

C	
CableCARD™	8, 11, 14
CableCARD™ INTERFACE	11, 14
CC	
Channel up / down buttons	9, 10, 33
Component signal input 1-3 terminals	11, 16

D

Dolby Digital
E EAS
H HDMI
I Input 1, 2, 3 terminals11, 15
J JPEG
LAMP indicator
M MPAA

NTSC Number keys		
OK button		9
P Password	9, 0, 88, 9,	23 20 40 24
R R-TUNE button RECALL button Remote Control Sensor Reset All Memory Functions RGB cable Right screen	9, 	33 10 . 7 20
SAP button	49- 35, 	53 44 34 18
TEMP indicator		
V VCR connections		21
X XGA		21
Y Y, PB, PR		16

Information

79

Customer' Record

The serial number of this product can be found on its back cover. You should note this serial number in the space provided below and retain this book, plus your purchase receipt, as a permanent record of your purchase to aid in identification in the event of theft or loss, and for Warranty Service purposes.

Model Number

Serial Number

Panasonic Consumer Electronics Company, Division of Panasonic Corporation of North America One Panasonic Way Secaucus, New Jersey 07094 Panasonic Sales Company ("PSC"), Division of Panasonic Puerto Rico, Inc. Ave. 65 de Infantería, Km. 9.5 San Gabriel Industrial Park, Carolina, Puerto Rico 00985 Printed in Indonesia